

CERTIFICATION UNDER 37 CFR §1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date 8/15/08, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number 6679291844 US addressed to: Box Patent Application, Honorable Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Ned Hoffman  
(Name of person mailing paper)

[Signature]  
Signature

**Veristar, Inc.**  
727 Allston Way  
Berkeley, California 94710  
510-843-3077

Honorable Commissioner of Patents  
and Trademarks  
BOX PATENT APPLICATION  
Washington, D.C. 20231

Attorney's Docket No. STA- 25

**NEW APPLICATION TRANSMITTAL**

Sir:

Transmitted herewith for filing is the patent application of Inventor(s): Veristar Corporation.

Title: A System and Method For Tokenless Biometric Authorization of Electronic Communications

Enclosed are:

The papers required for a filing date under CFR §1.53(b):

- [X] 13 Pages of specification (including 62 claim(s)); 9 Sheets of drawings.  
[ ] formal  
[X] informal
2. [X] Declaration or Oath
3. [ ] Power of Attorney
4. [X] Assignment + cover sheet
5. [X] Fee Calculation  
[ ] Amendment changing number of claims or deleting multiple dependencies is enclosed.

**CLAIMS AS FILED**

	Number Filed	Number Extra	Rate	Basic Fee \$760.
Total Claims	62-20	42	42 X \$18.	\$ 756
Independent Claims	2	0	X \$78.	\$ 0
Multiple dependent Claims			X \$260.	\$ 0
Filing Fee Total				\$ 1516

6. [X] Small Entity Statement - verified statement enclosed  
50% Filing Fee Reduction (if applicable) \$ 758.00

7. [X] Other Fees  
[X] Recording Assignment [\$40.00] . . . . . \$ 40.00  
[X] Other fees  
Specify \_\_\_\_\_ \$ \_\_\_\_\_

Total Fees Enclosed . . . . . \$ 798.00

8. Payment of Fees


[X] Check(s) in the amount of \$ 798.00. , is enclosed.  
[] Charge Account No. \_ in the amount of \$ \_ . **A duplicate of this transmittal is attached.**

9. [X] The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR 1.16 or 1.17 to Deposit Account No. **19-2551. A duplicate sheet is attached.**

10. [] Information Disclosure Statement

11. [X] Return Receipt Postcard

12. [X] Other: Specify Certification Under 37 CFR 3.73(B)

By: 

Name: Philip D. Lapsley

Chief Financial Officer  
Verustar, Inc.

Dated: 15 Aug 2000

Applicant or Patentee: Hoffman  
Serial or Patent No.: N/A  
Filed or Issued: \_\_\_\_\_

Attorney's  
Docket No.: STA-25

For: A System and Method For Tokenless Biometric Authorization of Electronic Communications

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
STATUS [37 CFR 1.9(f)] - SMALL BUSINESS CONCERN**

I hereby declare that I am

- ☐ the owner of the small business concern identified below:  
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN: Veristar Corporation

ADDRESS OF CONCERN: 727 Allston Way, Berkeley California 94710

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled A System and Method For Tokenless Biometric Authorization of Electronic Communications

inventor(s) Hoffman described in

☒ the specification filed herewith.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below\* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time or paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. [37 CFR 1.28(b)]

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Philip Dean Lapsley

TITLE OF PERSON OTHER THAN OWNER: Chief Financial Officer

ADDRESS OF PERSON SIGNING: 727 Allston Way, Berkeley California 94710

SIGNATURE Philip P. Lapsley DATE 15 Aug 2000

# **A System and Method for Tokenless Biometric Authorization of Electronic Communications**

By:  
Ned Hoffman

## **Cross Reference**

This application is a continuation-in-part of US application serial number 09/398,914 filed September 16, 1999, now pending, which is a continuation-in-part of US application serial number 09/244,784 filed February 5, 1999, now US Patent No. 6,012,039, which is a continuation-in-part of US application serial number 08/705,399, filed August 29, 1996, now US Patent No. 5,870,723, which is a continuation-in-part of US application serial No. 08/442,895 filed May 17, 1995, now US Patent No. 5,613,012, which is a continuation-in-part of US application serial No. 08/345,523, filed November 28, 1994, now US Patent No. 5,615,277.

## **Field of the Invention**

The invention relates generally to computer systems and methods designed to execute electronic communications on behalf of both individual users and enterprise communication centers. More specifically, this invention relates to tokenless biometric computer methods and systems which do not require the individual user to possess any man-made memory devices with resident user-customized information, such as smart cards, magnetic swipe cards or personal computers.

## **Background of the Invention**

Enterprise communication centers are often the primary point of contact through which medium- to large-scale enterprises centrally receive, respond to and initiate various types of electronic communications between themselves and individual users, and between themselves and other enterprises. Enterprise communication centers and their technology have a tremendous impact on the conduct of business in today's economy. Enterprise communication centers are used for selling goods and services, as well as for

providing customer care, and are a familiar part of the business life of virtually every person in the United States, and increasingly in the rest of the world. The enterprise communication center industry accounts for a significant segment of the U.S. economy, with a recent industry study estimating that more than 5% of the United States' Gross

5 National Product is transacted through formal enterprise communication centers, such as call-centers and email-centers. Further, an estimated installed base of 6,000,000 people in the United States are call-center or email-center agents, constituting the workforce dedicated to handling enterprise communications.

As the volume of electronic communications significantly increases, so has the  
10 complexity of handling this traffic through enterprise communication centers. The users that are serviced by enterprise communication centers are extremely diverse. The service provided by the communication center must be customized to each customer. This is especially important since it is currently estimated that more than 80% of incoming communications to an enterprise are generated by less than 20% of the users who are in  
15 contact with that enterprise; therefore those users expect to both receive user-customized attention and experience high satisfaction.

One of the primary factors causing the use of electronic communications to proliferate is the advent of personal computers, or "terminals", combined with improved communications networks such as intranets and the Internet. Such intranets are often  
20 proprietary, secure and are, in and of themselves, communicationally isolated from other enterprise intranets; the "Internet", by contrast, is a vast non-proprietary network composed of thousands of interconnected computers, including serving to openly interconnect separate enterprise intranets. The Internet is made up of large backbone networks (such as MILNET, NSFNET, and CREN), and smaller networks that link to  
25 them, together using UNIX utilities such as FTP, Archie, Telnet, Gopher and Veronica to ensure reliable access to the Internet.

The growth in popularity of electronic communications has accompanied a marketplace transition from using an off-line, individual desktop personal computing model to using an on-line, central-server communications model. Specifically,  
30 corporations and individual consumers are moving the main functions of storage, access,

processing and presentation of their electronic communications from decentralized, unconnected desktop terminals, to centralized databases on servers which service and connect to on-line PCs, known as “client terminals”, via dial-up, leased lines or wireless networks. Further still, these client terminals are proliferating because cost reductions in miniaturizing computer hardware components have led to the widespread use of a new generation of computing devices, known herein as “thin-clients”. These thin-clients are even less expensive and more mobile than traditional desktop terminals and client terminals and include, but are not limited to: wireless pagers; wireless and tethered telephones; network computers; thin-client exercise machines; electronic books; public access kiosks such as automated teller machines, vending machines, airport information terminals and or public kiosks; hand-held personal digital assistants such as Palm Pilots™ and the like; on-line photocopy machines; automobile embedded Internet-connected appliances which download preferred radio stations, seat and temperature adjustments, and the like; thin-client household appliances such as refrigerators, microwaves, and the like; thin-client home entertainment appliances including on-line televisions such as WebTV™, portable digital audio systems such as the Rio™, along with their associated remote controls.

The appeal of these new thin-clients is that they offer the potential for the user to send and receive electronic communications at virtually any time and from virtually anywhere. Many of these lower cost thin-clients access much of their processing and memory capacities on-line from remote servers via private network or public network connections. As a result, billions of new electronic communications are sent and received each year in the United States.

The popularity, complexity and importance of electronic communications has highlighted problems, affecting individual users and enterprise communication centers, which underscore the need for a new computer system and method that can provide convenient, reliable identifications of individual users. A first problem is that, with so many personal computing devices, the user now has user-customized electronic data stored on multiple man-made memory devices, or “tokens”, which the user must manage and possess for storage, access, processing and presentation of their electronic communications. Further, if the user wants all of these new computing tokens to possess

the same capabilities with respect to the user's personalized information and customized functions, then the user needs to frequently and redundantly enter all such user-customized data into each token. This is a cumbersome burden which most consumers eschew. If, on the other hand, the user does not effect such redundancies, then losing or  
5 damaging their primary personal computing token would be a severe blow. In this instance, or even in the instance where the user loses or damages a computing token with a subset of their information, then months, and perhaps years, of important personal and likely confidential electronic communications are irretrievably lost, or revealed to an untrusted third-party.

10 A second problem is that enterprise communication centers are overwhelmed by the significant increase in electronic communications. In conventional systems, separate application programs have been developed to service respective users' electronic communications by operators manning the enterprise communication center's operator consoles. Information regarding a customer, or user, has traditionally been obtained  
15 manually and embedded into the application programs. Such user-customized data is often stored in a variety of software formats, and also in various electronic files or databases. This occurs because there are many points of contact between an individual user and an enterprise: the user can contact the enterprise by sending emails, making phone calls, or meeting with sales personnel in the field. Further, separate user-  
20 customized records are often referenced and stored via various data, such as the user's name, social security number, home phone number, account number, mother's maiden name, email account, or billing address. This process leads to the segmentation and the dispersal of the customer-related data. As such, enterprise communication centers provide enterprise personnel with outdated, conflicting or incomplete customer data. This  
25 approach is inefficient and time consuming, and therefore costly. As an example, current industry statistics indicate that for a medium-sized enterprise communication center handling 250,000 messages per year, an increase of just 5 seconds in responding to each message amounts to a cost increase of over \$760,000 annually. The enterprise communication center industry has estimated that cost savings of between 30% and 40%  
30 can come from automating a higher percentage of communication responses and reducing

message volumes to customer representatives by providing more accurate and more customized handling of enterprise communications.

In sum, the increased volume and complexities of electronic communications, prompted in large part by the popularity of personal computing tokens which handle them, has exacerbated dual problems of: user-reliance on particularly vulnerable, customized memory tokens which can be easily damaged, lost or stolen, and; enterprise communication center overloads due handling vast numbers of electronic communications coming from the personal computing tokens. These problems simultaneously underscore the need for a new computer system and method which conveniently and reliably identifies individual users of electronic communications so that: users are relieved of the need to rely on possession of personal computing tokens to conduct their electronic communications, and; enterprise communications handling these electronic communications are able to run more efficiently.

To address the problem of protecting personal computing tokens and the resident electronic communications they contain, the use of various biometrics, such as fingerprints, hand prints, voice prints, retinal images, handwriting samples and the like have been suggested for identification of individuals. However, because the biometrics are generally themselves stored in electronic, and thus reproducible, form on the token itself and because the comparison and verification process is not isolated from the hardware and software directly used by the user attempting access, the problems of fraudulent access and of having to constantly carry these tokens is not alleviated. Further, such systems do not adequately isolate the identity verification process from tampering by someone attempting to gain unauthorized access.

Examples of this token-based biometric approach to system security are described in United States Patents 4,821,118 to Lafreniere; 4,993,068 to Piosenka et al.; 4,995,086 to Lilley et al.; 5,054,089 to Uchida et al.; 5,095,194 to Barbanell; 5,109,427 to Yang; 5,109,428 to Igaki et al.; 5,144,680 to Kobayashi et al.; 5,146,102 to Higuchi et al.; 5,180,901 to Hiramatsu; 5,210,588 to Lee; 5,210,797 to Usui et al.; 5,222,152 to Fishbine et al.; 5,230,025 to Fishbine et al.; 5,241,606 to Horie; 5,265,162 to Bush et al.; 5,321,242 to Heath, Jr.; 5,325,442 to Knapp; 5,351,303 to Willmore, all of which are incorporated herein by reference.



An example of a token-based security system which relies on a biometric of a user can be found in United States Patent 5,280,527 to Gullman et al. In Gullman's system, the user must carry and present a credit card sized token (referred to as a biometrics security apparatus) containing a microchip in which is recorded characteristics of the authorized user's voice. In order to initiate the access procedure, the user must insert the token into a terminal such as a public kiosk, and then speak into the terminal to provide a biometrics input for comparison with an authenticated input stored in the microchip of the presented token. The process of identity verification is generally not isolated from potential tampering by one attempting unauthorized access. If a match is found, the remote terminal then signals the host computer that access should be permitted, or prompts the user for an additional code, such as a PIN (also stored on the token), before sending the necessary verification signal to the host computer.

Although Gullman's reliance of comparison of stored and input biometrics potentially reduces the risk of unauthorized access as compared to numeric codes, like personal identification numbers, Gullman's use of the token as the repository for the authenticating data combined with Gullman's failure to isolate the identity verification process from the possibility of tampering greatly diminishes any improvement to fraud resistance resulting from the replacement of a numeric code with a biometrics. Further, the system remains cumbersome and inconvenient to use because it too requires the presentation of a personalized memory token in order to initiate an access request.

To address the problem of enterprise communication centers being overwhelmed by the increase in electronic communications, non-biometric, token-based identification systems have been suggested to encourage more reliable identification of users. One such approach has been to employ a "Caller ID" technology, which uses the originating hardware from which a call is initiated to "identify" the caller. This technique can apply to phone calls, whereby the originating phone number is detected, or it can apply to emails and Internet telephony, from which the originating Internet Protocol ("IP") address is detected. However, one critical deficit of this attempted solution is that Caller ID does not, in fact, identify the caller at all. Rather, the technology identifies the "token", or man-made memory device, which an individual uses to initiate the electronic communication. Examples of such tokens include the telephone line or the Internet

network address which the user is using. As such, if the individual uses another token, the Caller ID will identify that token differently from the one the individual previously used, even though in actuality the caller is the same person in both cases. This can result in significant confusion and inefficiencies in the handling of electronic communications by enterprise communication centers. This adversely impacts an enterprise's customer-acquisition and customer-retention, which in turn can have a significantly negative effect on enterprise revenue and profitability.

Almost uniformly, prior art disclose biometrics are token-based systems and teach away from biometrics recognition without user-dependence on personalized memory tokens. Reasons cited for such teachings range from storage requirements for biometrics recognition systems to significant time lapses in identification of a large number of individuals, even for the most powerful computers.

In view of the foregoing, there has long been a need for a computerized electronic communications system which simultaneously: accommodates the user's need to universally access, process and present their electronic communications with optimal convenience by not requiring the user to possess any man-made memory tokens with resident user-customized data, in order for the user to execute electronic communications, and; increases the accuracy, speed and cost-effectiveness of the handling of these electronic communications by enterprise communication centers.

Further, there is a need for a tokenless computer system which is highly fraud-resistant, and which is centered around the individual themselves by relying solely upon their unique biometric samples. Such a system should be able to function for the user wherever and whenever the user is using any generic on-line computing device, whether a desktop or a thin client, for conducting their electronic communications.

Further, there is a need for a computing system that provides both the user and the enterprise with centralized storage, access, processing and presentation of their electronic communications regardless of whether the personal computing device the user is using possesses only a resident subset of their user-customized data or in fact possesses none of their user-customized data at all. Further, there is a need for a computerized electronic communications system that provides the user with the above benefits whether or not the

personal computing device the user is using at any given time contains powerful resident memory and processing capacities, or whether it contains virtually no resident memory and processing capacities. Further, there is a need for a computer system which relieves the user from having to redundantly data-enter and update a variety of individual personal computing devices in order to achieve the same customized performance from any or all of such devices.

There is also a need for a computerized electronic communications system which relieves the user and the enterprise communication center from having to redundantly data-enter their personal demographics and customized electronic communications usage patterns into a variety of databases in order to achieve uniformly customized service. Additionally, there is a need for a computerized electronic communications system which enables a user to benefit from executing customized and complex commands governing their electronic communications regardless of whether the on-line computing device the user happens to be using is a high-powered desktop terminal or whether it is a hand-held, ultra thin-client terminal with virtually no resident computer processing or memory capabilities of its own.

There is further a need for a computerized electronic communications system which centrally stores user-customized data regardless of the many points of contact between an individual user and an enterprise: whether the user contacts the enterprise by sending emails, making phone calls, or meeting with sales personnel in the field. There is also a need for a system that enables enterprise communication centers to: provide enterprise personnel with current, complete and accurate user-customized data; automate a higher percentage of communication responses; reduce message volumes to customer representatives.

There is also a need for an electronic communications system that uses a strong link to the person being identified, as opposed to merely verifying a user's possession of any physical objects that can be freely transferred.

There is a further need for an electronic communications system that ensures user convenience by enabling user-authorization without requiring the user to possess, carry, and present one or more proprietary memory tokens, such as man-made user-customized

portable memory devices, in order to effect electronic communications. Anyone who has lost a smart card or a traditional notebook personal computer, left it at home, had it damaged or stolen knows well the keenly and immediately-felt inconvenience caused by such problems. Therefore, there is a need for an electronic biometric communications  
5 system that is entirely tokenless.

There is another need in the industry for a computerized electronic communications system that is sufficiently versatile to accommodate both users who desire to use personal identification codes (PICs), being alphabetical, numerical or graphical, for added security and also consumers who prefer not to use them.

10 Lastly, such a system must be affordable and flexible enough to be operatively compatible with existing networks having a variety of electronic communication devices and system configurations.

#### Summary of the Invention

The present invention satisfies these needs by providing a significantly improved  
15 system and method for tokenless accessing, processing and presentation of electronic communications requiring only a user's biometric. The method of the invention includes a tokenless biometric authorization of an electronic communication, using a biometric sample, a master electronic identicator, and a public communications network, wherein said method comprises: an electronic communication formation step, wherein at least one  
20 communication comprising electronic data is formed; a user registration step, wherein a user electronically submits a registration biometric sample taken directly from the person of the user; a public network data transmittal step, wherein the registration biometric sample is electronically transmitted to a master electronic identicator via a public communications network, said master electronic identicator comprising a computer  
25 database which electronically stores all of the registration biometric samples from all of the registered users; a user registration biometric storage step, wherein the registration biometric sample is electronically stored within the master electronic identicator; a bid biometric transmittal step, wherein a bid biometric sample, taken directly from the person of the user, is electronically transmitted to at least one electronic identicator; a user  
30 identification step, wherein an electronic identicator compares the bid biometric sample

to at least one registration biometric sample previously stored in an electronic identicator, for producing either a successful or failed identification of the user; an electronic communication authorization step, wherein upon a successful identification of the user by an electronic identicator, at least one electronic communication is authorized for execution; wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic stripe cards.

The method of the invention optionally includes a bid biometric transmittal step, wherein the electronic identicator comprises any of the following: a master electronic identicator, and; a subset electronic identicator, said subset electronic identicator comprising a computer database which electronically stores a subset of all of the registration biometric samples from registered users.

Further, any of the steps of said method optionally occur in any of the following chronological sequences: simultaneously, and; separated by any increment of time including seconds, minutes, hours, days, weeks, months, and years.

The method of the invention optionally includes: a first comparison step, wherein a subset electronic identicator compares the bid biometric sample taken directly from the person of the user with at least one registration biometric sample previously stored in the subset electronic identicator for producing either a successful or failed identification of the user; a public network data transmittal step, wherein if the subset electronic identicator returns a failed identification result, the bid biometric sample is electronically transmitted via a public communications network to a master electronic identicator; a second comparison step, wherein a master electronic identicator compares the bid biometric sample to at least one registration biometric sample previously stored in the master electronic identicator for producing either a successful or failed identification of the user; a communication authorization step, wherein upon the earliest successful identification of the user by an electronic identicator, at least one electronic communication is authorized for execution; wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic swipe cards.

Further, the method of the invention optionally includes: an enterprise registration step, wherein an enterprise electronically submits registration identity data; a public network data transmittal step, wherein the enterprise registration identity data is electronically transmitted to a master electronic indicicator via a public communications network; an enterprise registration identity data storage step, wherein the enterprise registration identity data is electronically stored within the master electronic indicicator; an enterprise bid identity data network transmittal step, wherein enterprise bid identity data is electronically transmitted to at least one electronic indicicator, said electronic indicicator comprising any of the following: a subset electronic indicicator and a master electronic indicicator; an enterprise identification step, wherein an electronic indicicator compares the enterprise bid identity data with enterprise registration identity data previously stored in the electronic indicicator, for producing either a successful or failed identification of the enterprise; an electronic communication authorization step, wherein upon a successful identification of the enterprise by an electronic indicicator and a successful identification of the user by an electronic indicicator, at least one electronic communication is authorized for execution; wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic swipe cards.

Further, the method of the invention optionally includes: a first comparison step, wherein a subset electronic indicicator compares the enterprise bid identity data with enterprise registration identity data previously stored in the subset electronic indicicator for producing either a successful or failed identification of the enterprise; a public network data transmittal step, wherein if the subset electronic indicicator returns a failed identification result, the enterprise bid identity data is electronically transmitted via a public communications network to a master electronic indicicator; a second comparison step, wherein a master electronic indicicator compares the enterprise bid identity data with enterprise registration identity data previously stored in the master electronic indicicator for producing either a successful or failed identification of the enterprise; a communication authorization step, wherein upon the earliest successful identification of the user by an electronic indicicator and the earliest successful identification of the enterprise by an electronic indicicator, at least one electronic communication is

authorized for execution; wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic swipe cards.

5 The method of the invention accommodates any unique biometric sample taken directly from the person of the user, including any of the following: a fingerprint, a facial scan, a retinal image, an iris scan, and a voice print, and; the enterprise is any legally formed entity comprising any of the following: a corporation, a foundation, a non-profit organization, a sole proprietorship, a limited liability company, and a partnership.

10 Further, the method of the invention optionally includes, during the user identification step, the user providing a personal identification code to the electronic identicator along with a bid biometric sample for purposes of identifying the user. The method optionally includes a user re-registration check step, wherein the user's registration biometric sample is compared by at least one electronic identicator to previously registered biometric samples wherein if a match occurs, the electronic  
15 identicator is alerted to the fact that the user has attempted to re-register. The method optionally includes a biometric theft resolution step, wherein a user's personal identification code is changed when the user's registered biometric sample is determined to have been fraudulently duplicated.

20 The method of the invention optionally includes any enterprise registration identity data that is unique, including any of the following: an alpha-numeric code, a hardware identification code, an email address, a financial account, a biometric of an authorized enterprise representative, a non-financial data repository account, a telephone number, a mailing address, a digital certificate, a network credential, an Internet protocol address, a digital signature, an encryption key, and an instant messaging address.

25 The method optionally includes a third-party communications step, wherein the electronic identicator electronically communicates with a third-party server in order to authorize the electronic communication.

30 The method optionally includes: a rule-module formation step, wherein a rule-module is formed in an electronic clearinghouse, said rule-module further comprising at least one user-customized pattern data which is associated with at least one execution command; a rule-module invocation step, wherein upon a successful identification of the

user, at least one previously designated user-customized rule-module is invoked; an electronic communication execution step, wherein upon the invocation of a user-customized rule-module, at least one electronic communication is executed.

The method optionally includes any user-customized pattern data, including any of the following: a user unique identification code; demographic information; an email address; a financial account; a biometric; Internet browsing patterns; a non-financial data repository account; a telephone number; a mailing address; purchasing patterns; database authorization fields; financial credit report data; a call-center queuing, routing and automated response program; an email-center queuing, routing and automated response program; data on pre-paid accounts or memberships for products or services; electronic data utilization patterns; employee status; job title; data on user behavior patterns; a digital certificate; a network credential; an Internet protocol address; a digital signature; an encryption key; an instant messaging address; user-customized medical records; an electronic audio signature; and an electronic visual signature.

The method optionally includes any execution commands, including any user-customized instructions for executing any of the following: accessing of stored electronic data, processing of electronic data, and presentation of electronic data. User-customized accessing of stored electronic data comprises execution of any of the following: activating of an Internet-connected device; accessing of a secured physical space, and unlocking of a secured physical device. User-customized processing of electronic data comprises invoking any of the following: a digital certificate, an identity scrambler, a database authorization field, an electronic consumer loyalty or consumer rewards incentive, an electronic advertisement, an instant messaging program, real-time tracking of an incoming caller or an email sender, a time and attendance monitoring program, an emergency home alarm and personal safety notification program, a real-time challenge-response program, a call-center queuing prioritization program, a call-center routing prioritization program, an email-center queuing prioritization program, an email-center routing prioritization program, an automated caller or emailer response program, a call-forwarding program, and an electronic intelligent software program for electronic data search and retrieval. User-customized presentation of electronic data comprises any of the



following: a print-out, a computer screen display, an audio message, a tactile sensation and a holographic image.

The method optionally includes a third-party communications step, wherein the electronic rule-module clearinghouse communicates with one or more third-party computers in order to invoke a rule-module. The method optionally includes user-customized pattern data being provided to the electronic rule-module clearinghouse by any of the following: the user, the electronic identifier, the electronic rule-module clearinghouse, and a user-authorized third party. The method optionally includes execution commands being provided to the electronic rule-module clearinghouse by any of the following: the user, the electronic rule-module clearinghouse, the electronic identifier and a user-authorized third party.

The method optionally includes: a master rule-module storage step, wherein all of the rule-modules from all of the registered users are stored in a master rule-module clearinghouse; a subset rule-module storage step, wherein a subset of all of the rule-modules from registered users is stored in a subset rule-module clearinghouse; a rule-module invocation step, wherein upon a successful identification of the user, at least one user-customized rule-module is invoked by any of the following: a subset rule-module clearinghouse and a master rule-module clearinghouse; an electronic communication execution step, wherein upon the invocation of a user-customized rule-module, at least one electronic communication is executed.

The method optionally includes: a first rule-module invocation step, wherein the subset rule-module clearinghouse attempts to invoke at least one user-customized rule-module; a public network data transmittal step, wherein if the subset rule-module clearinghouse fails to invoke a user-customized rule-module, the request is transmitted to a master rule-module clearinghouse via a public communications network; a second rule-module invocation step, wherein a master rule-module clearinghouse attempts to invoke at least one user-customized rule-module; an electronic communication execution step, wherein upon the earliest invocation of a user-customized rule-module, at least one electronic communication is executed.

The method optionally includes a master rule-module clearinghouse, comprising: a computer database which electronically stores all of the rule-modules for all of the

registered users, and; the subset rule-module clearinghouse comprises a computer database which electronically stores a subset of all of the rule-modules for registered users.

The present invention includes a device comprising a system for tokenless biometric authorization of an electronic communication, using an electronic communication input apparatus, a biometric input apparatus, and a master electronic identifier, wherein said system comprises: a) a communication input apparatus, further comprising a data entry device for formation of an electronic communication; b) a biometric input apparatus, further comprising a device for electronically scanning a biometric sample directly from the person of a user; c) at least one master electronic identifier, further comprising, (i) a computer database containing all of the electronically stored biometric samples from all of the registered users and, (ii) a comparator that electronically compares received a biometric sample with previously stored biometric samples to deliver either a successful or failed identification of the user; d) a data transmittal public network further comprising a public communications network that electronically transmits data between the biometric input apparatus and a master electronic identifier; e) an electronic communication authorization platform that authorizes execution of at least one electronic communication upon a successful identification of the user by an electronic identifier; wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic stripe cards.

The device of the invention preferably includes a master electronic identifier, further comprising a computer database which: has a location which is physically remote from the site at which the user submits a biometric sample directly from his person, and; requires the use of a public communication network that enables receipt of an electronically transmitted registration biometric sample. The device optionally includes a subset electronic identifier having: a computer database containing a subset of all stored biometric samples from registered users in the computer system, and; a comparator that compares a received biometric sample with previously stored biometric samples to deliver either a successful or failed identification of the user.

The device of said system is optionally used in any of the following chronological sequences: simultaneously, and; separated by any increment of time including seconds, minutes, hours, days, weeks, months, and years.

The device optionally includes: a first comparator, comprising a subset electronic  
5    indicator comparator that compares the bid biometric sample taken directly from the  
person of the user with at least one registration biometric sample previously stored in the  
subset electronic indicator for producing either a successful or failed identification of  
the user; a data transmittal public network comprising a public communications network  
that electronically transmits data between the subset electronic indicator and a master  
10    electronic indicator; a second comparator, comprising a master electronic indicator  
comparator which, if the subset electronic indicator fails to successfully identify the  
user, compares the bid biometric sample to at least one registration biometric sample  
previously stored in the master electronic indicator for producing either a successful or  
failed identification of the user; a communication authorization platform, that authorizes  
15    execution of an electronic communication upon the earliest successful identification of  
the user by an electronic indicator; wherein an electronic communication is  
biometrically-authorized without the user having to present any personalized man-made  
memory tokens such as smartcards, or magnetic swipe cards.

The device optionally includes: an enterprise data input apparatus for an  
20    enterprise to electronically input registration identity data; a data transmittal public  
network, further comprising a public communications network that electronically  
transmits data between the enterprise data input apparatus and a master electronic  
indicator; an electronic communication authorization platform, that authorizes  
execution of an electronic communication upon a successful identification of the  
25    enterprise by an electronic indicator and a successful identification of the user by an  
electronic indicator; wherein an electronic communication is biometrically-authorized  
without the user having to present any personalized man-made memory tokens such as  
smartcards, or magnetic swipe cards.

The device optionally includes: a first comparator, comprising a subset electronic  
30    indicator comparator that compares the enterprise bid identity data with enterprise  
registration identity data previously stored in the subset electronic indicator for

producing either a successful or failed identification of the enterprise; a data transmittal public network, further comprising a public communications network that electronically transmits data between the subset electronic identicator and a master electronic identicator; a second comparator, comprising a master electronic identicator comparator which, if the subset electronic identicator fails to successfully identify the enterprise, compares the enterprise bid identity data with enterprise registration identity data previously stored in the master electronic identicator for producing either a successful or failed identification of the enterprise; a communication authorization platform, that authorizes execution of an electronic upon the earliest successful identification of the user by an electronic identicator and the earliest identification of the enterprise by an electronic identicator; wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic swipe cards.

The device is optionally capable of electronically sampling any of the following biometric samples taken directly from the person of the user: a fingerprint, a facial scan, a retinal image, an iris scan, and a voice print. The device is optionally capable of using a personal identification code provided by the user to the electronic identicator along with a bid biometric sample for purposes of identifying the user. The device is optionally capable of a user re-registration, wherein the user's registration biometric sample is compared by at least one electronic identicator to previously registered biometric samples wherein if a match occurs, the electronic identicator is alerted to the fact that the user has attempted to re-register.

The device optionally includes a biometric theft resolution platform, wherein a user's personal identification code is changed when the user's registered biometric sample is determined to have been fraudulently duplicated. The device is capable of handling an electronic communication optionally comprising any of the following: an email, a telephone call, an encrypted data packet, an Internet telephony, and a facsimile. In the device, the data transmittal public network optionally comprises any of the following: an extranet, a wide area network, a cable network, a wireless network, a telephone network, the Internet, an ATM network, or an X.25.

The device optionally includes enterprise registration identity data comprising any of the following: an alpha-numeric code, a hardware identification code, an email address, a financial account, a biometric of an authorized enterprise representative, a non-financial data repository account, a telephone number, a mailing address, a digital certificate, a network credential, an Internet protocol address, a digital signature, an encryption key, and an instant messaging address. The device optionally includes a third-party server interconnecting network, wherein the electronic communication execution platform interconnects with one or more third-party servers in order to execute the electronic communication.

The device optionally includes: a rule-module clearinghouse, further comprising at least one user-customized pattern data which is associated with at least one execution command; a rule-module invocation platform, that invokes at least one previously designated user-customized rule-module upon successful identification of the user; an electronic communication execution platform, that executes at least one electronic communication upon the invocation of a user-customized rule-module.

The device optionally includes pattern data comprising any of the following: a user unique identification code; demographic information; an email address; a financial account; a biometric; Internet browsing patterns; a non-financial data repository account; a telephone number; a mailing address; purchasing patterns; database authorization fields; financial credit report data; a call-center queuing, routing and automated response program; an email-center queuing, routing and automated response program; data on pre-paid accounts or memberships for products or services; electronic data utilization patterns; employee status; job title; data on user behavior patterns; a digital certificate; a network credential; an Internet protocol address; a digital signature; an encryption key; an instant messaging address; user-customized medical records; an electronic audio signature; and an electronic visual signature.

The device optionally includes execution commands comprising user-customized instructions for execution of any of the following: accessing of stored electronic data, processing of electronic data, and presentation of electronic data. The device optionally includes user-customized accessing of stored electronic data further comprises execution of any of the following: activation of an Internet-connected device; accessing of a secured

physical space, and unlocking of a secured physical device. The device optionally includes user-customized processing of electronic data further comprises invoking any of the following: a digital certificate, an identity scrambler, a database authorization field, an electronic consumer loyalty or consumer rewards incentive, an electronic advertisement, an instant messaging program, a time and attendance monitoring program, an emergency home alarm and personal safety notification program, a real-time tracking of an incoming caller or an email sender, a real-time challenge-response program, a call-center queuing prioritization program, a call-center routing prioritization program, an email-center queuing prioritization program, an email-center routing prioritization program, an automated caller or emailer response program, a call-forwarding program, and an electronic intelligent software program for electronic data search and retrieval. The device optionally includes user-customized presentation of electronic data comprises any of the following: a print-out, a computer screen display, an audio message, a tactile sensation and a holographic image.

The device optionally includes the rule-module invocation platform being interconnected with one or more third-party computers. The device optionally includes user-customized pattern data provided to the electronic rule-module clearinghouse by any of the following: the user, the electronic identicator, the electronic rule-module clearinghouse, and a user-authorized third party. The device optionally uses execution commands provided to the electronic rule-module clearinghouse by any of the following: the user, the electronic rule-module clearinghouse, the electronic identicator and a user-authorized third party.

The device optionally includes: a master rule-module clearinghouse, comprising a computer database storing all of the rule-modules for all of the registered users; a subset rule-module clearinghouse, comprising computer database storing a subset of all of the rule-modules for registered users; a rule-module invocation platform, that invokes at least one user-customized rule-module upon identification of the user, said platform comprising any of the following: a subset rule-module clearinghouse and a master rule-module clearinghouse; an electronic communication execution platform, that executes at least one electronic communication upon the invocation of a user-customized rule-module.

The device includes a data transmittal public network further comprising: a cable network, a wireless cellular network, a wireless digital network, a telephone network, a wide area network, the Internet, an ATM network, and an X.25 connection.

The device also includes a master electronic identicator further comprising a computer database having a location which is physically remote from the site at which the user submitted the registration biometric sample. The device optionally includes a subset electronic identicator further comprising a computer database: being physically remote from the master identicator, and; capable of using any communications network for receiving the bid biometric sample.

The device optionally includes: a first rule-module invocation platform, comprising a subset rule-module clearinghouse that invokes at least one user-customized rule-module; a data transmittal public network, wherein if the subset rule-module clearinghouse fails to invoke a user-customized rule-module, the request is transmitted via a public communications network to a master rule-module clearinghouse; a second rule-module invocation platform, comprising a master rule-module clearinghouse that invokes at least one user-customized rule-module; an electronic communication execution platform, that executes at least one electronic communication upon the earliest invocation of a user-customized rule-module by a rule-module clearinghouse.

It is therefore an objective of this invention to enable users and enterprise communication centers to integrate all electronic communication data via a uniform system for biometrically identifying users without the need for the user's possession of any portable man-made memory devices. It is a further objective to provide uniquely accurate, convenient, and customized handling of electronic communications between individual users and enterprises. Using tokenless biometric technologies, this invention is designed for the benefit of individual users and enterprise communication centers, to uniquely customize and speed the handling of electronic communications, including: queuing, routing/distribution, prioritization, database access, data processing, data presentation, and automated response. This invention is further designed: to improve information management and workflow efficiency; to enable enterprises to better develop and sell their products and services according to specific customer needs, and; to have a positive impact on the effectiveness and profitability of the enterprise.

It is also an objective of the invention to improve the convenience of electronic communications by providing a computerized electronic communications system and method that eliminates the need for a user to directly possess any man-made memory token which is encoded or programmed with data personal to or customized for a single  
5 authorized user, such as a smart card, magnetic swipe card or even a personal computer with resident user-customized data. Further, it is an objective of the invention to employ a user's biometric sample for ensuring that only authorized users can access and conduct their own electronic communications. It is another object of the invention to provide tokenless technology for ensuring that users have the portability and mobility to gain  
10 immediate access to their electronic communications via any network-connected interface, regardless of the resident capabilities of the computing device the user is using to interface with the computer network and a central server.

It is another object of this invention that any client terminal, such as a public computing kiosk without resident user-customized data and without extensive resident  
15 software, be automatically and nearly instantly transformed, via a user's biometric log-on using this invention, into a terminal receiving on-line sophisticated computing capabilities that are customized for the user, complete with user-customized electronic communication accessing, processing and presentation. It is further an object of this invention that the user be able to receive customized presentation of: their Internet web  
20 portal displaying all URLs with which the user has pre-registered for access privileges; personalized recommendations for local activities, events and people that reflect their priorities; their Internet web site preferences, or "bookmarks"; and their Internet "cookies", or that set of data that an Internet website server provides to a user each time the user visits the website. It is further an object of this invention, that a central database  
25 save the information the cookies contains about the user, as a text file stored in the Netscape or Explorer system folder, and that this data can be temporarily downloaded this data to whatever client terminal the user is currently logged onto.

It is another object of this invention to provide a computerized electronic communications system centered around the identification of the user rather than any  
30 devices he possesses. In particular, this invention provides an electronic communication system that is universally accessible to the user because he only needs his biometric to



log onto a network, rather than having to rely on his having to possess any man-made memory tokens. In a traditional “unit-centric” communications model, the unit is any personalized memory token on which is stored user-customized electronic data, or information, that is: a) customized and perhaps even unique to a single user, and; b)  
5 required to execute an electronic communication based on electronic data customized to a particular user’s specifications or preferences. As such, the use or presentation of that memory token is a requirement for the user to conduct electronic communications which contains content customized, if not unique, to the user’s criteria.

In this invention, emphasizing a “biometric-centric” communications model, there  
10 is no need for any memory token to be required by the user to execute an electronic communication. This invention employs a user’s biometric identification to enable a user to experience consistently accurate and time-efficient contact with enterprise communications centers that centrally store, access, process and present any customized electronic communication independent of which computing device the user is using,  
15 whether it be a generic public kiosk with no resident information personalized to the user, or a hand held thin client with a minimal subset of data personalized to the user. In this invention, the computing and memory capabilities resident within the user’s personal computing device are nearly irrelevant, so long as the device can connect to an on-line network, such as the Internet, and provides the user with basic biometric input, data input  
20 and data display apparatus.

Yet another object of this invention is to construct and present for the user, on any biometric input apparatus the user is using, a user-customized gateway to the Internet containing their desired bookmarks, their personalized search engine and their customized web page directory. This is the user’s personal Internet web page “portal”  
25 which is a starting point for their electronic communications, including electronic mail, Internet web browsing or “surfing”, and the like.

A further object of this invention is that in all of these electronic communications, this invention provides the user the ability, with only a biometric log-on, to automatically enter all restricted or confidential third-party, or enterprise, databases to which the user  
30 has pre-authorized access privileges throughout communications networks.

It is another object of this invention that, once the user has completed their on-line usage of the client terminal for a particular on-line session, all of the data stream from their on-line session, including all new cookies provided by third-parties on behalf of the user and all new data on their browsing activity, be batched and forwarded to central  
5 database for downloading and storage.

It is another object of the invention to provide a computer system that is capable of verifying a user's identity, as opposed to verifying possession of propriety objects and information. It is yet another object of the invention to verify user identity based on one or more unique biometric characteristics physically personal to the user. Yet another  
10 object of the invention is to provide a computer system wherein access is secure, yet designed to be convenient and easy for a consumer to use.

It is yet another object of the invention to further enhance fraud resistance by maintaining authenticating data and carrying out the identity verification operations at a point in the system that is operationally isolated from the user requesting access, thereby  
15 preventing the user from acquiring copies of the authenticating data or from tampering with the verification process.

Yet another object of the invention is to provide users and enterprise communication centers with a central, or master, computerized data processing center, containing an electronic identicator and an electronic clearinghouse, for storage,  
20 accessing, processing and presenting of biometric data and associated user-customized electronic communications. As such, it is an objective of the invention to enable users and enterprise communication centers to enter their customized data into a centralized database, such data to include user biometric samples, user demographics, user computer function preferences, and user on-line activity or browsing patterns, and user purchasing  
25 patterns. This thereby enables users and enterprise communication centers to have all such personal data uniformly updated by him and uniformly accessible to him regardless of the computing device the user is using at any one time.

Yet another object of the invention is to enable enterprise, or third-party, databases to correctly identify users and enterprise communication centers using the  
30 computer system so that their on-line activity patterns can be linked to the user's personal

demographic database. In this way, the enterprise, or third-party, can more efficiently deliver services and information to pre-identified or interested users.

Another objective of the invention is that the enterprise, or third-party, database be identified by the computer system, wherein the enterprise, or third-party, database's identification is verified.

Another objective of the invention is to be added in a simple and cost-effective manner to existing computing terminals currently installed at points of usage and used over electronic communication networks, such as intranets, extranets, LANs, WANs, X.25, and the Internet. Yet another objective of the invention is to be efficiently and effectively operative with existing communications systems and protocols, specifically as these systems and protocols linked to the processing of electronic communications.

The present invention is significantly advantageous over the prior art in a number of ways. First, the present invention also improves the efficiency and accuracy of handling electronic communications by enterprise communication centers. With the identification of individual users via their biometric, the accessing, processing and presentation of electronic communications by enterprise communication centers can occur with more precision, shorter waiting periods, and better usage of workflow resources.

The present invention is also extremely easy and efficient for people to use because it eliminates the need for users to directly possess any personalized memory tokens such as magnetic swipe cards or personal computers with resident user-customized data, in order to access, process and present electronic communications. The present invention therefore eliminates the inconveniences associated with carrying, safeguarding, and locating such memory laden tokens. The user is now uniquely empowered, by means of this invention, to conveniently conduct their electronic communications at any time and from virtually anywhere without dependence upon any tokens which are easily stolen, lost or damaged.

The invention is clearly advantageous from a convenience standpoint by making electronic communications less cumbersome and more spontaneous.

Further, the present invention can significantly reduce the manufacturing and distributing costs of issuing and reissuing user-customized man-made memory tokens

such as magnetic swipe cards, and smart cards, or even powerful desktop personal computers, thereby providing further economic savings to users and companies.

Further, the present invention even eliminates the traditional requirement for a user to directly possess and use the ultimate memory token, a desktop personal computer with resident user-customized data.

Further, the present invention is also clearly advantageous from a convenience standpoint of users by providing centralized database tracking and storage of user-customized demographics, preferences and on-line activity or browsing patterns, thereby making electronic communications significantly more accurately and more precisely user-customized.

Moreover, the invention is markedly advantageous and superior to existing systems in being highly fraud resistant. The present invention virtually eliminates the risk of granting access to unauthorized users by determining identity from an analysis of a user's unique biometric characteristics. The invention further enhances fraud resistance by maintaining authenticating data and carrying out the identity verification operations at a point in the system that is operationally isolated from the user requesting access, thereby preventing an unauthorized user from acquiring copies of the authenticating data or from tampering with the verification process. Such a system is clearly superior to existing token-based systems wherein authenticating information, such as biometrics or personal codes, is stored on and can be recovered from the token, and wherein the actual identity determination is potentially in operational contact with the user during the access process.

Further, the invention can be cost-effectively integrated with existing electronic communication systems currently installed in corporate intranets and over the Internet.

These and other advantages of the invention will become more fully apparent when the following detailed description of the invention is read in conjunction with the accompanying drawings.

#### Brief Description of Drawings

**Figure 1** shows a preferred embodiment of the invention having a biometric input apparatus that is connected a data processing center (DPC) through a private network and a public communications network. The data processing center has an electronic identifier and a rule-module clearinghouse.

**Figure 2** shows a diagram detailing an embodiment of the invention with subset and master electronic identifiers, and subset and master rule-module clearinghouses.

**Figure 3** shows a flow chart of the process of registering a biometric sample within the DPC.

**Figure 4** shows a flow chart of the process of submitting a biometric sample to the DPC until an execution command of the identified user is executed by the execution platform.

**Figure 5** shows the detail of the rule-module clearinghouse, with pattern data and execution commands within rule-modules.

**Figure 6** shows various structures for association of pattern data and execution commands.

**Figure 7** shows the detail of an embodiment for search of a registered biometric sample database using personal identification codes.

**Figure 8** shows the detail of an embodiment with multiple biometric input apparatus units, multiple subset identifiers, and multiple subset rule-module clearinghouses.

**Figure 9** shows an embodiment with a private network, a public network, subset and master identifiers, and subset and master rule-module clearinghouses.

### Detailed Description

The invention provides a tokenless biometric method and system for authorizing and executing electronic communications using a data processing center (DPC) 10, that has a Master Electronic Identicator containing an electronic comparator (Master Identicator) 12 and, optionally, a Master Electronic Rule-Module Clearinghouse (Master Clearinghouse) 14.

An enterprise is any legally formed entity, such as a corporation, a non-profit organization, and the like. An individual user is any person who electronically communicates with an enterprise, often as a customer or supplier of the products and services provided by the enterprise. An electronic communication is the accessing, processing, or presentation of any electronic data or content which does not in and of itself constitute or execute an electronic financial transaction wherein the exchange or alteration of any financial assets occurs. Examples of electronic communications include: the accessing, processing, or presentation of electronic data, such as word-processed content, mathematical spreadsheets, emails, visual or graphic images, audible content, software code, pattern data, execution commands, computer software programs, Internet web sites, software rule-modules, electronic instant messaging, and the like. Such electronic communications take many forms, including: an electronic request for user-customized or user-unique access to stored database content; an electronic request to customize the processing of data according to user-customized or user-unique criteria; and an electronic request to present or display data in a pre-determined, user-customized format. Electronic communications which enterprise communication centers handle often include voice telephone calls (both land-line and wireless), voice over Internet ("VoIP") electronic mail ("email"), data packets, and the like.

Further, as defined herein, an electronic communication comprises any of the following: an email communication, a telephone call, an encrypted data packet, an Internet telephony communication, and a facsimile. As defined herein, a platform is any of the following: a computing module, a computing server, a computer database.

The user forwards their biometric samples to the data processing center via biometric input apparatus (BIA) 16. Electronic communications of data, including

the transmittal of the biometric samples from the BIA 16 to Master Identifier 12 optionally occurs over a public network 18, such as a wide area network (WAN). It is the essence of this invention that the user not present any man-made personalized tokens during an identification process in order for an electronic communication to be authorized. Such tokens include smart cards, magnetic swipe cards, or personal computers with resident user-customized data.

Tokenless biometric electronic communications are characterized by identifying the user with the user's bid biometric sample 62 submitted through a stand alone BIA 16 which is directly connected via dial-up, leased lines or wireless modem 56 to a public network 18, or through a BIA 16 incorporated to any client terminal such as a cell phone, a personal digital assistant (PDA), a desktop personal computer, a notebook computer, a thin-client, or other public terminal or kiosk such as an Automated Teller Machine (ATM). In a preferred embodiment, the user is identified through biometrics while enterprise, or third-party, databases 28 which are accessed to complete the electronic communication, are identified through the verification of a digital certificate issued by an authorized certifying authority. It is also

In one embodiment, execution of a Rule-Module (RM) 50 or an Execution Command (EC) 52 by the Execution Platform (EP) 38 optionally results in a declined communication due to lack of an identifiable enterprise or third-party 28, a closed or inoperative enterprise or third-party database 28, or some other immediately detectable problem condition. If the communication is declined, the Clearinghouse 14 or the Identifier 12 transmits the decline notification back to the BIA.

In one embodiment, the BIA 16 is actually built-in and/or integrated with a personal computer, although the invention does not require that the personal computer contain any resident user-customized data, such as Pattern Data (PD) 54, Execution Commands 52 or private encryption keys.

In another embodiment, the third-party is a person who is a representative of an enterprise, such as a business entity, that has authorized the user to utilize the third-party databases 28 for data access, data processing or data presentation to complete the electronic communication.

An electronic communication is any transmission that allows for access of electronic data, processing of electronic data, or presentation of any electronic data. Such electronic communications take many forms, including a user-customized electronic request for access to stored database content, an electronic request to digitally sign data using a digital certificate, or an electronic request to present or display data in a customized format. In sum, an electronic communication is the accessing, processing, or presentation of any electronic data or content which does not in and of itself constitute or execute an electronic financial transaction wherein the exchange or alteration of any financial assets occurs.

Examples of electronic accessing of data include accessing databases with content or text, access to web sites, web site chat rooms, Internet educational courses, Internet games or game arcades, Internet examinations or tests, medical or health data, Internet-based software from application service providers (ASPs), and physical access authorization fields. Other such data access includes other databases that require membership such as extent of insurance coverage, airline frequent flier rules, health club membership privileges, concert seats, movie rentals, check verification, and electronic voting. The results of accessing electronic communications further include: activation of an internet-connected device, including turning on a personal digital assistant, an automobile, and a photocopy machine, and; entry to a secured physical space, including electronically opening a door and opening a briefcase with an embedded wireless connection to the Internet.

Examples of electronic processing of data include, intelligent search of a public network **18** to locate information (Pull Data), such as the retrieval of investment data and news regarding a specific company, the retrieval medical news about a specific topic, the retrieval of price quotes for services or products, the retrieval of mathematical spreadsheets, emails, visual or graphic images, audible content, software code, computer software programs, Internet web sites, electronic instant messaging, and the like.

Pattern Data (PD) **54**, as used herein, is any data or information which is customized to a particular user (“user-customized”). Such Pattern Data includes user-customized demographic information, user-customized Internet search or browsing



preferences, user-customized purchasing patterns, and the like. It should be noted that user-customized is different from user-unique. Electronic data or electronic communications which are customized to a user, or “user-customized”, have been customized by or for a user, but is not necessarily unique to that user. Therefore, user-customized data which applies to one user can also apply identically to another user. However, electronic data or electronic communications which are unique to a user, or “user-unique”, are distinctive and without equal, and hence are exclusive to that particular user.

An Execution Command (EC) **52**, as used herein, is any computer software command which is associated with at least one Pattern Data **54**.

As shown in Fig. 6, a Rule-Module (RM) **50**, as used herein, is any conditional association between at least one Pattern Data **54** and at least one Execution Command, whereby if a Pattern Data **54** matches data submitted by a user, at least that one associated Execution Command **52** is in turn invoked by that Pattern Data **54** in order to execute at least one electronic communication.

The Clearinghouse **14** is a database or registry of at least one Pattern Data **54** and at least one Execution Command **52** together forming at least one Rule-Module (RM) **50**, and has the capability to delete, add or edit associations between any Pattern Data **54** and any Execution Command to delete, add, edit, or invoke any Rule-Module **50** in order to execute an electronic communication.

The system used for identifying the user by their bid and registration biometric samples comprises the following components:

- Biometric Input Appartus (“BIA”)
- Communication lines
- Master Electronic Identicator Server containing an electronic comparator (“Identicator”)

These components together allow a user to access, process or present an electronic communication without the user being required to present any man-made memory tokens such as plastic or paper cards, or a personal computer with resident user-customized data.

## Biometric Input Apparatus (BIA)

The BIA 16 is a device that gathers biometric samples from users. Each BIA 16 conducts one or more of the following operations:

- 5           • electronically gather biometric input or sample directly from the person of a user
- gather a PIC code or password from a user
- secure communication between BIA 16 and DPC 10 using encryption
- secure storage of secret encryption keys
- store and retrieve a unique BIA hardware identification code
- 10          • secure enclosure & components from unauthorized tampering
- present or display electronic messages and allows users to either view or hear an electronic communication message
- scan a magnetic stripe card
- allow parties to select and edit electronic communications.

15           Biometric input is gathered using a biometric sensor 11 located within BIA 16. Biometric sensor 11 is a finger image sensor, however it is understood that other types of biometric sensors such as iris scan, voice print, retinal scan, facial scan and others can be used.

20           For BIAs requiring a fingerprint sensor, the BIA 16 has a biometric fraud detection mechanism (not shown) that will assure that any biometric input gathered from the biometric sensor is from a real physical person, instead of a copy or replica.

          For systems employing a personal identification code (PIC), the PIC is gathered using a keypad or PIC pad that is preferably located securely inside the BIA.

25           Communication security is provided by encryption using unique secret keys known only to that specific BIA 16 and the DPC 10, and the DES encryption algorithm, preferably triple-encrypted. Triple encryption means successive encrypt/decrypt/encrypt operations using two distinct 56-bit DES keys. This provides significantly higher security than a single encryption operation with one 56-bit DES key. Alternately, a

public/private key system can also be used to encrypt information that passes between BIA 16 and DPC 10. Both DES and public key encryption is well known in the industry.

The BIA 16 also has secure memory that can store and retrieve the unique secret encryption keys used to enable secure communications with the DPC 10. In this  
5 embodiment, this is battery backed-up RAM that is set up to be erased whenever the tamper-detect circuitry reports that tampering has been detected.

To use encryption keys, a key management system must be employed to assure that both sender and receiver are using the same key. When using DES, a preferred key management system is DUKPT, which is well known in the industry. DUKPT is  
10 designed to provide a different DES key for each communication, without leaving behind the trace of the initial secret key. The implications of this are that even successful capture and dissection of a BIA 16 will not reveal messages that have previously been sent, a very important goal when the effective lifetime of the information transmitted is years. DUKPT is fully specified in ANSI X9.24. The DUKPT key table is stored in the secure  
15 memory.

Each BIA 16 preferably has a hardware identification code that is registered with the Master Identifier 12 at the time of manufacture. This makes the BIA 16 uniquely identifiable to the Master Identifier 12 in all communications from that BIA 16. The BIA hardware identification code is preferably stored in write-once memory.

20 BIA 16 physical security is assured by standard mechanisms. Preferably, these comprise tamper-detect circuitry, an enclosure that cannot be easily opened without visibly injuring the enclosure, erasable memory for critical secrets such as encryption keys, write-once memory for hardware identification, tight integration of all components, and “potting” of exposed circuitry.

25 Information such as the content of a communication, the identity of a user, or other communication-related information is displayed using an integrated LCD screen 6. It is preferable that the LCD screen 6 be connected securely to the other components in the BIA 16 to maintain security. Approval or cancellation of a communication is done using the BIA 16 keypad.

A magnetic stripe reader **20** is optionally used to read any information that is encoded on the magnetic stripe of a card. This is preferably used during initial registration of the user for efficient gathering of a user's registration with the DPC. Optionally, the BIA **16** also validates public key digital certificates. In one embodiment, public keys of a particular certifying authority are initially stored in the BIA **16** at the time of construction.

Although a preferred embodiment is described above, there are many different variations on specific BIA **16** implementations. Fundamentally any device that is secure, that can gather a biometric sample, and that can connect to the Master Identifier **12** via some form of communication line **18** can function as a BIA **16**.

The BIA hardware identification code is not used to identify the user. However, once a user is identified by their biometric, the BIA hardware identification code optionally functions as Pattern Data **54** to invoke certain access, processing, or display commands in the Clearinghouse.

It should be noted that a BIA **16** machine is any device that electronically reads or scans a biometric sample **62** of a user. Example devices which can incorporate a BIA **16** include wireless pagers, cellular and standard telephones, on-line network computer terminals, on-line exercise machines that are connected to and can be accessed through a communications network, on-line electronic books which can download electronic text from an Internet site, on-line automated teller machines that are connected to a communications network such as a public network **18**, on-line vending machines that are connected to a public network **18** or a private network **58**, on-line information terminals or public kiosks at airports which are connected to a communications network such as a public network **18**, on-line personal digital assistants such as Palm Pilots™, on-line photocopy machines that are either connected to a communications network such as a public network **18** or a private network **58**, automobile embedded Internet-connected appliances which download preferred radio stations, seat and temperature adjustments, and the like, household appliances such as refrigerators, microwaves, and the like that are connected to a communications network such as a public network **18**, home entertainment appliances including on-line television devices such as WebTV™, and compact disc audio systems and

the like, which are connected to communications networks such as a public network 18, along with their respective remote controls.

## Registration

A user typically registers at least one biometric sample **62** with the Master Identifier **12** via a BIA **16** device. Any user-unique biometric sample **62** can be registered including a fingerprint, a facial scan, a retinal image, an iris scan, or a voice print. Biometric samples gathered during the registration step are stored at a data processing center (DPC) **10**. Preferably, all registration biometrics are stored in at least one Master Identifier **12**, which contains all of the stored registration biometric samples from all of the users registered with the system. Registration biometric samples are transmitted from the BIA **16** to the Master Identifier **12** via a public communications network **18**. Note that “intranet” or “private network” as defined herein is distinct from the “non-intranet” or “public network” as follows: an “private network” is a client-server computer system within an enterprise’s own internal local area network. Such private networks **58** are often proprietary, secure and are, in and of themselves, communicationally isolated from other enterprise private networks; the “Internet”, by contrast, is a vast public network which is composed of thousands of interconnected computers which is not proprietary to any single enterprise. Public network computers can also serve to interconnect separate enterprise private networks. As such, a public communications network, comprises any of the following: a cable network, a wireless cellular network, a wireless digital network, a telephone network, a wide area network, the Internet, an ATM network, and an X.25 connection. In particular, the Internet is made up of large backbone networks (such as MILNET, NSFNET, and CREN), and smaller networks that link to them.

At the time of registration of users, each user is assigned a User ID Code that is unique and exclusive to each user. The User ID Code is automatically generated by the DPC **10** to validate that a user’s bid biometric sample **62** has matched with that user’s stored biometric sample. The User ID Code is not known to the user. Further, the User ID Code is different from the Personal Identification Code (PIC) of the user. The user’s Personal Identification Code is known to the user, and it is optionally presented to the Master Identifier **12** by the user during the identification process to increase the security and efficiency of the DPC’s biometric matches.

The user optionally registers user-customized data with a Master Clearinghouse 14, which stores the complete set of rule-modules 50 from all registered users. Note that the Master Clearinghouse 14 comprises at least one server or computing platform, and can include several proximally located servers or computing platforms, interconnected via a private network 58, a local area network (LAN) and the like. Examples of user-customized data include Pattern Data 54, an Execution Command 52 (EC), or a Rule-Module 50 (RM). A Rule-Module 50 comprises at least one Pattern Data 54 which is associated with at least one Execution Command. These data are stored in the Clearinghouse 14 and are optionally registered by the user, by the Clearinghouse 14, by an authorized enterprise or third-party 28, or any combination of the above named parties.

Authorized enterprises or third-parties 28 optionally register identification credentials with the Master Identifier 12, in order to enable the Master Identifier 12 to authenticate to a specific user that their electronic communication has been correctly executed by the intended enterprise or third-party 28.

Examples of authorized enterprise or third-party 28 execution of electronic communications include accessing data in enterprise or third-party 28 databases or servers, processing data by enterprise or third-party databases 28 or servers, presenting or displaying data to the user by an enterprise or third-party database 28, or processing of data by the DPC 10. If the third-party is a person, the user can register a biometric with the Master Identifier 12. If the third-party is an entity or enterprise, such as a corporation, it can register a digital certificate with the Master Identifier 12. Third-party digital certificates are available from certifying authorities, and they provide the assurance that the entity with the certificate is the authentic owner of that identity. These certificates contain readable text and other information that describes the entity. These certificates include corporate logos, a corporate address, as well as the name of the enterprise.

BIA hardware identification codes are unique numbers assigned to BIA 16 devices at the time of manufacture. If an entity, such as a company, wishes all user-customized communications issuing from a given BIA 16 to be communicated to a

particular intranet, the company registers any such BIAs 16 with the Master Identifier 12, which updates the BIA 16 device records.

Preferably, the security surrounding the registration of an entity's digital certificates or of the BIA hardware identification codes with the Master Identifier 12 is extremely strong, as this is a potential source for large losses over a short period of time.

A user registers with the Master Identifier 12, and at least one Pattern Data 54 which include a biometric sample 62, a biometric-PIC association, or any other registration data such as the user's demographics. To register, a user submits a registration biometric sample 62 provided by their physical person to the BIA 16. The BIA 16 determines that the biometric scan is non-fraudulent, and translates and compresses that biometric scan into a format suitable for rapid transmittal to the Master Identifier 12. In a preferred embodiment, the user enters a PIC code into the BIA 16 keypad. The BIA 16 transmits the registration data and identification data to the Master Identifier 12. The Master Identifier 12 inserts the biometric (or biometric-PIC) into the appropriate Master Identifier 12 database and generates a User ID Code that is unique to the user. From this point on, any time the user is identified by the Master Identifier 12, the user's User ID Code is forwarded to the Clearinghouse 14 and it invokes at least one Rule-Module 50 customized to that user. In the Clearinghouse 14 database, a Rule-Module 50 is created that is identified by the user's User ID Code. This enables the person to originate electronic communications.

In one embodiment, the Master Identifier 12 automatically assigns a new user-customized Clearinghouse 14 sub-database to a person's biometric, biometric-PIC, or User ID Code. Note that the Master Identifier 12 comprises at least one server or computing platform, and can include several proximally located servers or computing platforms, interconnected via a private network 58 or a local area network (LAN).

In one embodiment, there is a re-registration check step, wherein the user's registration biometric sample 62 is compared against previously registered biometric samples 62 wherein if a match occurs, the computer system is alerted to the fact that the user is attempting or has re-registered with the Master Identifier 12.



In another embodiment where a PIC is used for identification purposes, a biometric theft resolution step is preferably employed, to change a user's PIC when it is determined that a user's biometric sample 62 has been fraudulently used or duplicated.

### **Subordinated User Registration**

5 In one embodiment, a user registers with the DPC 10 as a primary user. This means that the primary user can restrict, modify, or otherwise control a subordinated user's electronic communications to access, process or present electronic data and electronic content stored on various enterprise or third-party 28 Execution Platforms 38, or enterprise or third-party 28 databases. This can be desired, for example, when the  
10 primary user is a parent who wishes to influence or govern the on-line browsing activity of their minor child, who as the subordinated user is permitted access to certain desirable electronic databases while being denied access to undesirable electronic databases. In this embodiment of the invention, the primary user registers with the DPC 10 their biometric sample 62 along with the subordinated user's biometric sample 62. Separate  
15 and unique User ID Codes are issued by the Master Identifier 12 for the primary user and the subordinated user, respectively.

Once the subordinated user logs onto a network and is identified by the Master Identifier 12, the subordinated user's User ID Code is forwarded to the Clearinghouse 14 to identify the subordinated user's customized Rule-Modules 50. Additionally, in a  
20 Rule-Module 50 designated for the subordinated user, a Pattern Data 54 is constructed indicating that the user is in fact a subordinated user, and the associated Execution Command 52 dictates that the subordinated user's access limits, restrictions and priorities must be governed by Rule-Modules 50 of the primary user. In one embodiment, a subordinated user is prohibited by the primary user's Rule-Modules 50 from purchasing  
25 cigarettes and alcohol, or from accessing R-rated films being shown in theatres. If the primary user's Rule-Modules 50 are silent with respect to any particular subordinated user's requested electronic communication, the subordinated user's relevant Rule-Modules 50 will govern that electronic communication and permit the electronic communication to proceed unimpeded. In a different embodiment, a subordinate user can  
30 in turn have another subordinated user.

Because a user's biometric is used for identification purposes, even if a subordinated user attempts to re-register with the DPC 10 under a different name, a search of previous registration biometric samples will show that the registrant has in fact previously registered with the DPC 10 and is a subordinated user.

5

### **Communication Lines**

Communications between the BIA 16 and the Master Identifier 12 occur via many different communication methods. Most depend on the particular communication networks already deployed by the organization or retailer that deploys the communication authorization system.

In an embodiment the BIAs 16 are connected via Ethernet to a local router, which is itself connected to a network operations center (NOC) via frame relay lines. At least one Subset Identifier 13 is located at the NOC. Messages are sent from BIA 16 to the Identifier using TCP/IP over this network. In another embodiment, the BIAs 16 are connected via a cellular digital packet data (CDPD) modem to a CDPD provider, who provides TCP/IP connectivity from the BIA 16 to a private network 58 to which at least one Subset Identifier 13 is attached.

In yet another embodiment, a BIA 16 is connected via a public network 18, to at least one Master Identifier 12. TCP/IP is used to transmit messages from BIA 16 to Master Identifier 12.

There are many different ways to connect BIA 16 to an Identifier, both tethered and wireless, that are well understood in the industry, including but not limited to: a private network 58, including a local area network ("LAN"), or; a public network 18, including the Internet, an extranet, and a wide area network ("WAN").

### **Data Processing Center**

The Data Processing Center (DPC) 10 is comprised of an Electronic Identifier 12, , an internal Execution Platform 38, a Firewall 40, a Decryption Platform 22, a Gateway Machine 26, a Logging Facility 42, and optionally a Rule-Modules Clearinghouse 14.

## Electronic Identicator

The Master Electronic Identicator containing an electronic comparator ( Master Identicator) **12** serves to identify the user in an electronic communication. The Master Identicator **12** uses the electronic comparator to compare a user's bid biometric sample **62** with previously stored biometric samples from registered users, in order to identify the user. If a bid biometric sample **62** is successfully matched against a registered biometric sample, and the user is positively identified, the User ID Code which had been assigned to the user during initial registration will be forwarded to the Clearinghouse **14**. The User ID Code transmitted by the Master Identicator **12** is used by the Clearinghouse **14** to locate the Rule-Modules **50** that are customized to that user.

The Master Identicator **12** is connected to a public network **18** or a private network **58** using a firewall machine **40**. Messages are sent to a Gateway machine **26**, which is responsible for overseeing the steps required to process the communication, including forwarding the communication to the Master Identicator **12** and optionally the Master Clearinghouse **14**.

Preferably, electronic messages transmitted between the BIA **16** and the DPC **10** are encrypted. For this, the communication processor uses the Decryption Platform (DP) **22**, which utilizes the hardware identification code of the BIA **16** to identify the encryption codes that is required to decrypt messages from the BIA **16**. Once decrypted, the identity of the user is determined using Master Identicator **12**, which provides storage, retrieval and comparison of biometric samples **62**.

In an embodiment, during the user identification step, the Master Identicator **12** requests the user to submit their PIC, and this PIC is used by the Master Identicator **12** in combination with the user's bid biometric sample **62** for purposes of validating the identity of the user.

In another embodiment, the Master Identicator **12** provides periodic user verification queries. In this embodiment, in order for a user to extend an on-line session, the user is requested by the Master Identicator **12** to verify themselves using any of the following: a user bid biometric sample **62** or Pattern Data **54**, such as a personal identification code ("PIC").

In another embodiment, an enterprise or third-party 28 recipient of an electronic communication is also identified by the Master Identifier 12 using any of the following electronic verification: a third-party ID Code, a digital certificate, an Internet protocol ("IP") address, a biometric, a hardware identification number, or any  
5 other code, text or number that uniquely identifies the enterprise or third-party. In this way, the Master Identifier 12 is enabled to provide the user with confirmation that the correct enterprise or third-party received the electronic communication. Examples include confirming that the correct web site or remote database was accessed by the user, that the correct enterprise or third-party designee received the user's email or  
10 instant message, and the like.

In another embodiment, the Master Identifier 12 platform is integrated with the Clearinghouse 14 (Clearinghouse) platform.

In a preferred embodiment, more than one Master Identifier 12 provides fault tolerance from either natural or man-made disasters. In this embodiment, each Master  
15 Identifier 12 uses a backup power generator, redundant hardware, mirrored databases, and other standard fault tolerant equipment known in the industry.

Identification of the enterprise, or third-party, and the user optionally occurs using different methods, depending on the identification information that is provided by the BIA. The Master Identifier 12 has subsystems for each type of information that is  
20 received by the Master Identifier 12, and each subsystem is highly optimized to provide rapid identification as outlined below.

In a preferred embodiment, a Master Identifier 12 comprises subsystems that can identify parties from the following information:

- biometric data and personal identification code (PIC)
- biometric data alone
- digital identification (digital certificates)
- BIA hardware identification code

#### **Biometric Identification Subsystem (BID)**

In one embodiment of the Master Identifier 12, the BID subsystem comprises at least two BID processors, each of which is capable of identifying users only from their biometric sample.

5 In one embodiment, each BID processor contains the entire database of biometrics. To distribute the communications evenly across processors without undue effort, the Master Identifier 12 determines randomly which BID processor will be used for a given electronic communication, and delegates the identification request to that BID processor. That BID processor performs a search of its biometric sample database in order to find a matching registered biometric sample.

10 In another embodiment, other information is present that assists the BID processor in searching the database. For finger images, this includes information such as the classification of the image (whirl, arch, etc.), and other information about the finger ridge structure that is useful for selecting out biometrics that are not likely to match (or information on biometrics that are likely to match). Such biometric-based sorting and  
15 classification systems using mathematical algorithms, are known in the art for fingerprints and for other biometrics such as retina of the eye, voice print, and face vascular patterns.

Biometric comparisons are optionally conducted using samples from multiple biometrics. This includes the same type of biometrics from an individual such as  
20 fingerprint samples from different fingers, or different types of biometric samples such as a finger print and a voice print. In some embodiments, multiple biometrics are used to more rapidly and more accurately identify individuals.

### **Biometric-PIC Identification Subsystem (BPID)**

25 In one preferred embodiment, the BPID subsystem 30 comprises at least two BPID processors, each of which is capable of identifying parties from their biometric and personal identification codes.

Preferably, the database of parties identifiable from biometric-PIC combinations is distributed equally across all BPID processors. Each processor is responsible for a  
30 subset of identifications.

The Master Indicator 12 determines which Biometric-PIC from the BPID subsystem 30 is responsible for a given subdivision of the biometric database. In one embodiment, one BPID 32 is responsible for identifying people with PICs 1-10, another BPID 34 is responsible for identifying PICs 11-20, and a third BPID 36 is responsible for identifying PICs 21-30. For example, all messages from the BIA 16 containing a PIC that equals the number 30 would be routed to BPID 36 for identification of the user.

Once a BPID processor receives a bid biometric sample 62 and PIC for identification, the processor searches through its database, retrieving all registered biometric samples that match or correspond to that particular bid PIC. Once all corresponding registered biometric samples are retrieved, the Master Indicator 12 compares the bid biometric samples obtained from the electronic communication to all retrieved registered biometric samples. If a match occurs, the Master Indicator 12 transmits the identity of the user or the User ID Code to the Clearinghouse 14. If no match is found, the Master Indicator 12 transmits a "not identified" message back to gateway machine 26 and to the logging facility 42.

### **Digital Identification Subsystem**

In a preferred embodiment, the Digital Identification subsystem comprises multiple processors, each of which is capable of identifying an enterprise or third-party from their digital certificates. In this embodiment, digital certificates are used to perform digital identification of a third-party. Preferably, these include corporate web site addresses and certifying authorities only. Where possible, computers provide digital certificates for identification of the computer and users use their biometrics for identification of the user.

Verifying that a particular digital certificate is valid requires a public key from the certifying authority that issued that particular digital certificate. This requires that the digital identification subsystem have a list of certifying authorities and the public keys used to validate the digital certificates they issue. This table must be secure, and the keys stored therein must be kept up to date. These processes and others relating to the actual process for validating digital certificates are well understood in the industry.

### **BIA Hardware Identification Subsystem (BHI)**

In a preferred embodiment, BIA hardware identification codes are translated into an enterprise or third-party identification by the BHI subsystem. This subsystem maintains a list of all BIAs manufactured. Preferably, when a particular user uses a BIA 16, that user's geographic location is identified by their use of that particular BIA 16 during that electronic communication session.

In another embodiment, the BIA hardware identification code does not serve to identify either the user or a third-party. This is the case in BIAs 16 installed in public venues such as airport terminals, Automated Teller Machines in banks, or computers with BIAs for home use.

### **User ID Code**

A User ID Code is an electronic message transmitted to the Clearinghouse 14, which informs the Clearinghouse 14 that a user has been successfully identified, and instructs the Clearinghouse 14 to invoke the Rule-Modules 50 for that particular user.

### **Rule-Modules Clearinghouse**

In a preferred embodiment, once the user is identified by the Master Indicator 12, the User ID Code is forwarded to the electronic Rule-Module Clearinghouse (Clearinghouse) 14. The Clearinghouse 14 instructs the Execution Platform 38 to take the necessary steps for executing the Execution Commands 52 that are associated with the Pattern Data 54 registered with the Clearinghouse 14.

### **Rule-Modules**

The Clearinghouse 14 is comprised of at least one Rule-Module 50 which is indexed specifically to one or more registered users (hence, "user-customized"). Therefore, the Rule-Modules 50 are optionally not unique or exclusive to a single user. The Clearinghouse 14 functions as a central storage facility for registering, indexing, updating, and invoking various Rule-Modules 50, and their software components, and to refine and improve execution of electronic communications according to user-customized preferences and on-line activity patterns. Each of these

Rule-Modules 50 is composed of at least one Pattern Data 54 which is associated with or electronically linked to at least one Execution Command 52. As defined herein, user-customized does not necessarily mean that any Pattern Data 54 or the Execution Command 52 is unique to a user, but rather that they are indexed to or are assigned to a specific user. As such, the same Pattern Data 54 or Execution Command 52 can be assigned to several specific users, and hence would not be unique to any one user.

The Clearinghouse 14 optionally stores user-customized Pattern Data 54 that is unassociated with any user-customized Execution Commands 52 and optionally stores user-customized Execution Commands 52 that are not associated with any user-customized Pattern Data 54. Therefore, such unassociated Pattern Data 54 or Execution Commands 52 are optionally stored within the Clearinghouse 14 until they are associated with a Pattern Data 54 or an Execution Command 52 together thereby forming an executable Rule-Module 50.

Once the user is identified by the Master Indicator 12, the User ID Code is forwarded to the Clearinghouse 14. The Clearinghouse 14 takes the User ID Code, optionally along with the BIA hardware ID code, the BIA 16 location data and the electronic communication request, and searches among the user's customized Rule-Module 50 to invoke all of the Pattern Data 54 relevant to the electronic communication being undertaken.

#### **Pattern Data (PD)**

As previously noted, Pattern Data 54 can be provided by the user while the Execution Command 52 for that Pattern Data 54 is provided by the Clearinghouse 14 or an authorized third-party, or the Pattern Data 54 provided by the Clearinghouse 14 and the Execution Command 52 by an authorized third-party 28, to form a single Rule-Module 50.

Pattern Data 54 of a user is stored electronic data, which is customized to at least one user. A single Pattern Data 54 includes any of the following stored user-customized electronic data: a personal identification code, which is optionally alphanumeric; demographic information; an email address; a BIA hardware identification code; a financial account; the user's date of birth; a secondary biometric; a non-



financial data repository account; a telephone number; a mailing address; purchasing patterns; data on pre-paid accounts or memberships for products or services; electronic data usage patterns; Internet browsing patterns; employee status; job title; pre-set data on a user's current activity patterns; a digital certificate; a network credential; an Internet protocol address; a digital signature; an encryption key; an instant messaging address; personal medical records; an electronic audio signature; and an electronic visual signature. Although a User ID Code is optionally used as Pattern Data 54, the User ID Code is unique to each user and is not shared between users.

Any such Pattern Data 54 can be provided to the Clearinghouse 14 by: the user, the Clearinghouse 14, or an authorized third-party 28.

### **Execution Commands (ECs)**

The Execution Commands 52 executed by the Execution Platform 38 transmits electronic messages necessary for accessing, processing, or presentation of electronic data or content. Such communications include invoking a user's membership or eligibility for accessing insurance benefits (health, automobile, home, life, etc.), accessing travel service club benefits, accessing entertainment or travel event admittance, accessing electronic voting based on a user's place of residence, accessing electronic filing for taxes, and accessing privileges for permission to write paper checks or electronic checks.

Additionally, these Execution Commands 52 include activation and invocation of a user's privileges for accessing, processing or displaying stored database content. Such content includes word-processing files, spreadsheet files, software code, graphics files, audio files, medical records; activation and invocation of a user's privileges for accessing, processing, or displaying on-line content-rich media, wherein such media includes, but is not limited to, Internet web sites, on-line audio or graphical content, electronic game content, on-line chat content, on-line messaging content, on-line educational content, on-line academic examination-taking, on-line personalized medical and health content, server-based computer software programs and hardware drivers.

Any Execution Command 52 is invoked by any Pattern Data 54 with which it is associated. Execution Commands 52 are user-customized instructions or commands

which include Execution Commands **52** governing data access privileges, Execution Commands **52** governing data processing, Execution Commands **52** governing data display or presentation.

In one embodiment, a single Pattern Data **54** is associated with multiple Execution Commands **52**, thereby forming multiple Rule-Modules **50**. Also shown in Fig. 6 is another embodiment, where multiple Pattern Data **54** are associated with a single Execution Command, again forming multiple Rule-Modules **50**. Also shown in Fig. 6, another embodiment there is only one Pattern Data **45** associated with one Execution Command **52**. Any user-customized Execution Command **52** can be provided to the Clearinghouse **14** by any of the following: the user, the Clearinghouse **14**, or an authorized third-party **28**.

There are several embodiments of user-customized Execution Commands **52** that govern access to electronic data such as web sites, web site content and databases. Each such Execution Command **52** is optionally invoked by the User ID Code serving as the Pattern Data **54**. This Execution Command **52** is a software command that provides an authorized user access to any secured electronic data, such as those on enterprise or third-party **28** databases. Invoking this Execution Command **52** enables the user to simultaneously access all Internet chat or messaging forums, web sites and on-line database content to which the user has authorization.

In another embodiment, the enterprise or third-party being **28** contacted by the user for data access is also identified by the Master Identifier **12** using public/private key cryptography. Once the enterprise or third-party is successfully identified by the Master Identifier **12**, this invokes a Rule-Module **50** in the Master Clearinghouse **14** which is unique to this enterprise or third-party **28** and which is used to confirm to the user that the correct third-party **28** database was accessed.

In another embodiment, an Execution Command **52** governing electronic communications for data access is a Universal Access Command (UAC) that is unique to the user. The Universal Access Command is an Execution Command **52** that activates an on-line or Internet-connected device, such as a wireless pager, a wireless or tethered telephone, a network computer, an exercise machine that is connected to a non-intranet, an electronic book, an on-line public access Internet terminal, an automobile or household

appliance that is connected to a non-intranet, an Internet-connected personal digital assistant such as a Palm Pilot™, an on-line photocopy machine, an Internet-connected digital audio player such as the Rio™. In such instances, the executed Rule-Module 50 renders the on-line or Internet connected device operational and permits the user that has gained access using their biometrics to conduct on-line activity to control or otherwise access the above mentioned Internet connected devices. For example, in one embodiment, an exercise machine incorporates a BIA 16 and is connected to a public network 18. A user of the exercise machine enters their biometric sample, which is compared to registered biometric samples by the Master Identifier 12. Once the user is identified using their biometric samples, and the exercise device is identified using its hardware identification code, the Rule-Module 50 executes a command allowing the user to gain access to the exercise device. Optionally, additional Rule-Modules 50 allow a user to save the details of their exercise activity (number of times, weight amount, date of exercise, etc.) on that exercise device as Pattern Data 54, in order to keep track of past performance and as a template for future exercise routines.

In another embodiment, an Internet-connected electronic book that incorporates a BIA 16, is activated when the Master Identifier 12 successfully identifies the user. This allows the user to download text and graphics of complete novels or films for which they have previously paid.

In another embodiment, a personal digital assistant (“PDA”), such as the Palm Pilot™, incorporates a BIA 16. When activated after the Master Identifier 12 has successfully identified the user, the personal digital assistant permits the user to download and take on-line academic examinations. In another embodiments, a BIA 16 is incorporated in: an Internet-connected digital audio player such as the Rio™, whereby when activated as a result of successfully identification of the user by the Master Identifier 12, the the Rio™ audio player permits the user to download music for which they have authorization. Optionally, additional Rule-Modules 50 can track how many pages of the electronic book have been displayed and can retain a bookmark for the most recently read page. Optionally, additional Rule-Modules 50 can track how many times a downloaded electronic audio track has been played.

In another embodiment, a BIA **16** is incorporated in: an Internet-connected medicine cabinet lock or gating mechanism; and Internet-connected door lock or gating mechanism. When activated as a result of successfully identification of the user by the Master Identicator **12**: the medicine cabinet automatically unlocks via an electromagnetic locking/unlocking mechanism, and; separately, the door automatically unlocks via an electromagnetic locking/unlocking mechanism.

Upon the Master Identicator's **12** successful identification of the user from their bid biometric, other embodiments of Execution Commands **52** governing electronic communication access include permitting the user to access their health insurance account and validate their benefits to a health-care provider prior to being admitted to a hospital, to access their pre-paid entertainment account and validate to admittance personnel their eligibility to attend an entertainment event, such as a live music concert on a pre-designated day, at a pre-designated time and to sit in a pre-designated seat, to access their video club account and validate to a merchant their eligibility to rent videos under their pre-paid membership, to access their driver's license on-line and validate to an authority their eligibility to drive a car, to purchase restricted products like alcohol or tobacco, or to access a restricted entertainment event such as an R-rated film being shown in theatres, to access their credit-rating account and validate to a cashier their eligibility for check-writing privileges, to access an Internet web site and enter a real-time chat room with other people on-line.

Further embodiments of Execution Commands **52** governing electronic communication access include entitling a user to extend an on-line user-customized session by repeating their user-customized session log-in by entering either their biometric or at least one of their user-customized Pattern Data **54** when periodically queried to do so by the Master Identicator **12** or Clearinghouse **14**, to access customized radio or television programming, wherein the user can be provided with customized programming, with or without time restrictions, that reflects pre-designated preferences, such as a channel broadcasting only news on companies in which the user has an investment or a channel broadcasting only music from Broadway theater shows which the user has seen or indicated a desire to see, to access restricted portions of corporate private network **58** databases on a selective basis,

based upon pre-designated Pattern Data **54**, such as the user's job title or company division, to access their travel reservations and validate to the admittance attendant that the user is eligible to travel, such as boarding a particular flight or a specific train, on a pre-designated day, at a pre-designated time, and to sit in a pre-designated seat,  
5 to access on-line position "papers" of user-customized political candidates and electoral ballot initiatives, and validate to an authorized enterprise or third-party **28** that the user is eligible to vote in particular elections, such as voting for a particular candidate running from a particular user-customized district.

There are several embodiments of user-customized Execution Commands **52**  
10 governing the processing of electronic data and electronic communications. Such Execution Commands **52** can govern: user-customized notification preferences for such electronic communications as real-time medical updates, pending Internet auctions, electronic stock trades and the like; user-customized instructions for user-location designating, for example, that the user can be located by enterprises or third parties **28** via  
15 whichever BIA **16** the user is using during an indicated time period, whereby the user can automatically receive their e-mails, instant messages, phone calls, faxes, and the like in real-time at the particular BIA **16** in use by him; user-customized travel customizations such as the user's preferences for lodging accommodations, travel costs, food, travel locations, and the like.

Further embodiments of user-customized Execution Commands **52** governing the  
20 processing of electronic data and electronic communications include: user-customized identity presentation preferences depending upon various pre-designated criteria such as the identity of a particular recipients, the user's sending location, and the like, whereby a user's pre-selected personal identifier, such as a distinct audio or visual sample, is  
25 electronically presented to an enterprise or third-party **28** recipient of the user's electronic communication; invocation of user-customized Internet environment preferences, whereby a user's preferences are used to create a customized Internet web portal with the user's preferred search engines, bookmarks, and the like; user-customized data presentation preferences, whereby the priority, formatting and organization of displaying  
30 data is pre-designated by the user; user-customized customization of Internet search

engines, and; user-customized customization of intelligent data tracking and extrapolating software programs.

In one embodiment of an Execution Command **52** governing the processing of an electronic communication, the user-customized Internet search engine is customized to locate, retrieve and present electronic communications for the user using an intelligent tracking and extrapolating software program. In one embodiment, the user's customized Rule-Modules **50** provide instructions that even when the user is not logged onto a network, the Pattern Data **54** and Execution Commands **52** are periodically and automatically executed, added, changed or deleted based on the user's previous BIA **16** and on-line usage patterns. As a result, the user-customized search engine is automatically and progressively refined and customized to the user's evolving preferences and on-line activity patterns as tracked and interpreted by the user's own electronic, automated intelligent software program.

As an example of the above, the user's intelligent software program can direct the user's search engine to automatically conduct periodic, customized on-line data retrievals reflecting user-customized priorities for: product or service promotional offers or discounts via email or instant messaging; user-customized investment updates; user-customized medical or health information; competitive product or service pricings across a broad range of on-line merchants; hobby or recreational interests; interactive user-customized on-line advertisements, wherein product or service providers are permitted to provide unsolicited information to a user based upon certain user-customized criteria; on-line event calendaring, wherein a user is automatically notified of upcoming events or activities reflecting their interests.

Further, the intelligent software program can extrapolate from the user's existing preferences and on-line activity patterns to automatically and periodically recommend to the user new data that can expand or delete the user's Pattern Data **54** and Execution Commands **52** based upon the intelligent software program's algorithmic projection of what the user's on-line preferences and activities will be in the future.

In another embodiment, an Execution Command **52** functioning as an intelligent tracking and extrapolating software program centrally integrates data on the user's Internet browsing to provide user-customized recommendations on new products and

services available from any number of Internet web sites or Internet merchants. Examples include the Execution Commands for retrieval of new types of music, books, and investment opportunities that reflect the user's preferences, but that such recommendations are pre-selected based on the Execution Command **52** having

5 automatically conducted competitive price-comparisons from various enterprise or third-party **28** databases. In another embodiment, an Execution Command **52** integrates user-customized data from a user's calendaring or scheduling software program to provide the user with customized recommendations on user-customized offering for products, services or upcoming events based on the user's pre-scheduled activities in their on-line

10 calendar.

In another embodiment, an Execution Command **52** appends a customized, user-customized audio or visual identifier which accompanies an electronic communication for presentation to the recipient. This identifier is appended to the user's electronic communication as a form of "electronic personal signature" to readily notify the recipient

15 that the authenticated user sent the message. This identifier can be a unique biometric image or biometric sound sampled from the user, or it can be a non-biometric, distinct graphical or audio sample selected by the user to reflect their personal preferences, such as a cartoon image or a favorite sound or audio tone.

In another embodiment where greater security is required, an Execution

20 Command **52** governs the appending of a user-unique network credential or digital certificate to an electronic communication. If a user employing a biometric seeks to append their digital certificate to an electronic communication, the user stores at least one command to sign electronic documents using their private keys, which are themselves centrally stored on an Clearinghouse **14** server. As such, the user's private

25 keys are invoked as a header for the user's electronic communication which, in combination with the electronic document itself and an MD5 calculation of the document, together form a digital signature. At a later time, an authorized recipient can use the user's public key from the DPC **10** or a third-party certifier to verify the authenticity of the sender and the electronic document's contents to yield a secure,

30 authenticated electronic communication. In this way, users do not have to manage their own private keys, nor do they have to retain physical possession of their digital

certificates via smart cards or personal computers with resident user-customized data. In one embodiment, public keys of a particular certifying authority are initially stored in the BIA 16 at the time of construction.

In another embodiment, an Execution Command 52 governs the processing of an on-line, user-customized calendaring program or Internet calendaring web site, wherein the user's on-line scheduling calendar is automatically updated by the user-customized search engine and the user-customized intelligent search and tracking software program based upon user-customized Pattern Data 54. This could include, but would not be limited to, automatically updating the user's on-line calendar based on upcoming: user-customized entertainment events, user-customized business seminars, user-customized airline discounts to the user's preferred destinations, user-customized candidate and elections bulletins, and the like.

In another embodiment, the user pre-designates Execution Commands 52 governing the processing of electronic communications which filter the access and presentation of data when the user is subordinated user who is co-registrant or legal dependant of the primary user himself. Examples of such subordinated users are the children or the spouse of a user. Examples of such access and presentation, or viewing, filters can be restrictions pre-designated by the primary user governing: subordinated user access to Internet web sites with adult or violent content; subordinated user access to on-line television or radio programming with adult or violent content; subordinated user access to a public network 18 with restrictions covering on-line session length; subordinated user access to educational on-line resources which are automatically "pushed" to the subordinated user during a particular on-line session, as pre-determined by the primary user, in order to pro-actively circumscribe the content which a particular subordinated user is permitted to view or download.

In another embodiment, an Execution Command 52 provided to the Clearinghouse 14 by an authorized enterprise or third-party 28, such as a user's employer, governs the processing and prioritization of electronic communications to the user on a private network 58. As such, the Execution Command 52 determines which electronic communications are automatically "pushed" to the user during a particular on-line session, as pre-determined by the authorized enterprise or third-party 28, in order to pro-



actively circumscribe the content which a particular user is permitted to view or download. Other embodiments include Execution Commands 52 processing electronic communications using: real-time tracking of an incoming caller or an email sender, a time and attendance monitoring program, a real-time challenge-response program, a call-center queuing prioritization program, a call-center routing prioritization program, an email-center queuing prioritization program, an email-center routing prioritization program, an automated caller or emailer response program, a call-forwarding program,

Embodiments of user-customized Execution Commands 52 governing the display or presentation of electronic communications include controlling the organization and prioritization of on-line content such that text, audio, graphics and tactile sensations are displayed according to a user's pre-determined preferences. This includes displaying informational updates in a certain prioritization order, wherein user-customized regional news can be presented prior to national or international news, displaying expenditure records in user-customized categories which reflect anticipated tax deduction categories, such as home improvement expenses, charitable contributions, and the like, displaying customized user-customized Internet web sites or portals, including the user's pre-designated bookmarks, preferred web links, calendaring programs, email mail addressing rosters, multiple email accounts with their accompanying inbox messages, user-customized instant messaging "buddy" lists.

Other embodiments of user-customized Execution Commands 52 governing the display or presentation of electronic communications include: displaying accrued user-customized consumer rewards incentives or customized on-line advertising according to a user's prescribed priorities, such that skiing apparel is presented to the user at a time based on their calendaring program's designating their scheduled winter vacation or such that an advertisement for new coffee flavors from the user's preferred vendor is presented during the user's morning log-on session; displaying the user's customized fitness program on an Internet-connected exercise machine, whereby the user is reminded of the number of repetitions the user performed at what difficulty level during their last exercise session, and thereby also presents a recommended number of repetitions and a recommended difficulty level for the user's current session.

Other embodiments include Execution Commands **52** governing: presentation or display filters which circumscribe what text, graphic or audio content the user is permitted to view; presentation or display filters which govern which products or services a user is permitted to purchase, such as a subordinated user whose parent is a primary user, and where the subordinated user is prohibited from purchasing cigarettes, is limited in their selection of on-line merchants, is limited in the amount of on-line session time the user is permitted to have in a single day, and the like. Preferably, each identification request and each communication request, whether successful or not, is logged in the Logging Facility (LF) **42**.

In a preferred embodiment, more than one Clearinghouse **14** servers provide fault tolerance from either natural or man-made disasters. In this embodiment, each Master Identifier **12** uses a backup power generator, redundant hardware, mirrored databases, and other standard fault tolerant equipment known in the industry.

#### **Global Queries and Global Execution Commands**

In one embodiment of the invention, the User ID Code matches Global Queries **53** which invoke user-customized Pattern Data **54** which in turn invoke Global Execution Commands **55**. An example would be as follows: upon the Identifier **12** having successfully identified the user via his biometric sample **62**, the Identifier **12** submits that user's unique User ID Code to the Clearinghouse **14**. In this embodiment, all submitted User ID Codes automatically match to a set of Global Queries **53** in the Clearinghouse **14**. For example, when any User ID Code is submitted, it matches automatically with Global Queries **53** such as the following:

"What is the user's income level?"; "What that the user's home address?"; "What is the user's favorite carbonated beverage?". The answers to these Global Queries **53**

are contained in the user-customized Pattern Data **54** which are statements that contain data customized to the user. In this example, the Pattern Data **54** responses to the above Global Queries **53** are, respectively, as follows: "Fifty-five thousand dollars"; "46 Shattuck Square, Berkeley, CA"; "Pepsi-Cola®". In this embodiment, these Pattern Data **54** responses invoke Global Execution Commands **55** which are, respectively: "Send the user a notice of newly allowable tax deductions courtesy of H&R Block® accountants"; "Inform the user via email that there is a sale on compact

disc stereo systems at the Circuit City® retail store in Emeryville near his home”;

“Notify the user that he is eligible to enter into the Pepsi-Cola® drawing for free apparel and sports accessories featuring the Pepsi logo®”. In this embodiment,

therefore: the Global Queries 53 and the Global Execution Commands 52 apply

5 automatically to any or all User ID Codes that are submitted to the Clearinghouse 14, and are non-specific, or non-customized, to any particular user; however, the Pattern Data 54 is specific to, or customized to, the specific user whose User ID Code has been submitted. In this manner, this embodiment renders a database architecture for the Clearinghouse 14 that has: user-customized sub-databases with user-customized  
10 Pattern Data 54; while the Global Queries 53 and the Global Execution Commands 55 sub-databases are not customized to any one single user.

#### **Interconnections and Communications between the Electronic Identifier and Rule-Module Clearinghouse**

In one embodiment, the Master Identifier 12 platform(s) can be physically  
15 distinct and separate from the Master Clearinghouse 14 platform(s) with each housed in independent servers or Platforms. In another embodiment, the Master Identifier 12 platforms(s) can be physically integrated with the Master Clearinghouse 14 platforms, whereby the Master Identifier 12 and Master Clearinghouse 14 are physically interconnected and integrated together within one server or platform. In both  
20 embodiments, communications between the Master Identifier 12 and the Master Clearinghouse 14 occur via many different methods and means that are well known in the art. Most depend on the particular communication networks already deployed by the organization or company that deploys the electronic communication authorization system.

25 In one embodiment, the Master Identifier 12 and the Master Clearinghouse 14 are connected via Ethernet to a local router, which is connected to a network operations center (NOC) via frame relay lines. Messages are sent between the Master Identifier 12 and the Master Clearinghouse 14 using TCP/IP over this network. In another embodiment, the Master Identifier 12 and the Master Clearinghouse 14 are connected  
30 via a cellular digital packet data (CDPD) modem to a CDPD provider, who provides

TCP/IP connectivity from the Master Identifier 12 to a private network 58 to which at least one Master Clearinghouse 14 is attached.

In yet another embodiment, an Master Identifier 12 is connected via a public network 18, as is at least one Master Clearinghouse 14. TCP/IP is used to transmit messages from between the Master Identifier 12 and the Master Clearinghouse 14.

There are many different ways to connect the Master Identifier 12 and the Master Clearinghouse 14 that are well understood in the industry, such as cable TV networks, cellular telephone networks, telephone networks, the Internet, an intranet, a LAN, a WAN, or an X.25 network.

The Master Identifier 12, using an electronic comparator, automatically compares a user's bid biometric sample with previously stored biometric samples 62 from registered users.

The Master Identifier 12 and the Master Clearinghouse 14 hardware platforms are high-reliability database servers, well known in the art, such as those available from Sun™, Compaq™, Tandem™, IBM™ and the like. Further, the Master Identifier 12 and the Master Clearinghouse 14 software can incorporate scalable database architecture, well known in the art, such as those available from Oracle™, Sybase™, Informix™ and the like.

## **Electronic Identifier and Rule-Module Clearinghouse: Master Servers and Subset Servers**

In a preferred embodiment, a Master Identifier 12 is responsible for storage of the entire set of biometric samples and digital certificates registered for use with this invention. In another embodiment, a Master Clearinghouse 14 is responsible for storage of the entire set of Pattern Data 54, Execution Commands 52, and Rule-Modules 50 registered for use with this invention.

Each Master Identifier 12 and Master Clearinghouse 14 site is preferably made up of a number of computers and databases connected together over a LAN (known in the industry). Multiple and redundant master computer sites ensure reliable service in the face of disaster or serious hardware failure at any single central computer site.

A subset identifier containing an electronic comparator (Subset Identifier) **13** store subsets of the entire set of biometric samples and digital certificates registered for use with this invention. A Subset Clearinghouse **15** stores subsets of the entire set of Pattern Data **54**, Execution Commands **52**, and related Rule-Modules **50** registered for use with this invention. Such data subsets are circumscribed by any number of criteria, including: usage location, usage frequency, usage recency, usage demographics and usage volume of electronic communications.

In one embodiment, when the user enters their bid biometric sample **62**, and optionally bid personal identification code, into a first biometric input apparatus **16**, the bid biometric sample **62**, and optionally the bid personal identification code, is transmitted to a first Subset Identifier **13**. The first Subset Identifier **13** contains a comparator which compares the bid biometric sample **62** against the subset of previously stored biometric samples **62** contained in the first Subset Identifier **13** to produce either a failed or successful first identification result. If the first subset computer returns a failed first identification result, the bid biometric sample **62**, and optionally the bid personal identification code, is electronically transmitted via a public network **18** to a Master Identifier **12** for comparison of the entered bid biometric sample **62** to biometric samples **62** stored in the Master Identifier **12** to produce either a failed or successful second identification result. Optionally, the result of the first or second identification result is externalized from the computer system preferably to the user by a display unit **6**.

Optionally, if the user individual is not identified by the Subset Identifier **13**, and the Master Identifier **12** was able to produce a successful second identification result, the Master Identifier **12** transmits the identified registered biometric sample **62** to the particular Subset Identifier **13** which requested the identification, for storage.

In an embodiment, upon expiration of a previously determined time period from the most recent identification of an individual, the user's biometric sample **62**, and optionally his personal identification code, is purged from the Subset Identifier **13**. However, the user's biometric sample **62**, and optionally his personal identification code, is not automatically removed or purged from the Master Identifier **12**. This frees database space on the Subset Identifier **13** as well as reduces the number of biometric comparisons the Subset Identifier **13** has to perform for making an identification result.

This, in turn, increases the accuracy and speed of the identification process. The user's biometric sample **62** and personal identification code, however, are stored with the Master Indicator **12** for future identification requests made by Subset Indicators **13** which have previously purged user biometric samples database, or by those subset  
5 Indicators who had never contained the biometric sample **62** of that specific user on their database.

Note that the Subset Indicator **13** can contain any subset of registered user biometric samples; such a subset can based on a user's demographics, geography, frequency, recency, purchasing patterns, on-line browsing patterns, and the like.

10        Optionally, in another embodiment there is at least one Master Rule-Module Clearinghouse (Master Clearinghouse) **14** and at least one Subset Rule-Module Clearinghouse **15**. When a user is successfully identified by a Subset Indicator **13**, the User ID Code is transmitted to a Subset Clearinghouse **15**, informing the Subset  
15 Clearinghouse **15** that the user has been successfully identified, and instructing the Subset Clearinghouse **15** to invoke the Rule-Modules **50** for that particular user.

         Additionally, the Rule-Module **50** invocation process commences at the Subset Clearinghouse **15** and Master Clearinghouse **14** after receiving the User ID Code. A first Subset Clearinghouse **15** attempts to produce either a failed or successful first Rule-Module **50** invocation result. If the first Subset Clearinghouse **15** returns a failed first  
20 invocation result, the User ID Code is transmitted via a public network **18** to a Master Clearinghouse **15** for an attempt to produce either a failed or successful second invocation result. Optionally, the result of the first or second invocation result is externalized from the computer system preferably to the user by a display unit.

         Optionally, if user-customized Rule-Modules **50** are not successfully invoked by  
25 the Subset Clearinghouse **15**, and the Master Clearinghouse **14** was able to produce a successful second invocation result, the Master Clearinghouse **14** transmits the user-customized rule-module to the particular Subset Clearinghouse **15** which requested the invocation, for storage.

         In a preferred embodiment, upon expiration of a previously determined time  
30 period from the most recent rule-module invocation by an individual, the user-customized rule-modules are purged from the Subset Clearinghouse **15**. However, the user-

customized Rule-Modules **50** are not automatically removed or purged from the Master Clearinghouse **14**. This frees database space on the Subset Clearinghouse **15** as well as reduces the number of searches the Subset Clearinghouse **15** has to perform for invoking a user-customized Rule-Module **50**. This, in turn, increases the accuracy and speed of the Rule-Module **50** invocation process. The user-customized Rule-Modules **50** are stored in the Master Clearinghouse **14** for future invocation requests made by Subset Clearinghouses **15** which have previously purged user-customized Rule-Modules **50**, or by those Subset Clearinghouses **15** who had never contained the Rule-Modules **50** of that specific user on their database.

Note that the Subset Clearinghouse **15** can contain any subset of registered user Rule-Modules **50**; such a subset can be based on a user's demographics, geography, frequency, recency, purchasing patterns, on-line browsing patterns, and the like.

Additionally, in some embodiments the invention has subset data processing capabilities, wherein multiple Subset Identifiers **13** and multiple Subset Clearinghouses **15** exist, some of which store a subset of the total number of registered parties.

This system comprises at least one Master Identifier **12** and, optionally, one Master Clearinghouse **14**, which contains a complete set of all data associated with parties registered with the system. The system further comprises at least two Subset Identifiers **13** and two Subset Clearinghouses **15** that are physically apart from each other. Each Subset Identifier **13** and Subset Clearinghouse **15** contains a subset of data associated with parties registered within the Master Identifier **12** and Master Clearinghouse **14**, respectively. Data communications lines allow electronic communications to flow, respectively, between each Subset Identifier **13** and each Subset Clearinghouse **15**, and at least one Master Identifier **12** and, optionally, at least one Master Clearinghouse **14**.

In all embodiments, the earliest successful identification of the party or parties involved in the electronic communication, along with the earliest invocation of the requisite Rule-Module(s) **50** permits the electronic communication to be processed appropriately by enterprise or third-party **28** servers.

In order to make communications between the master servers and the subset servers secure, the system further comprises encryption and decryption means, wherein communications between the master servers and subset servers are encrypted.

Furthermore, each DPC 10, whether including master and subset servers, has  
5 electrical power backup and multiple redundancy in all of its critical hardware and database systems.

It is preferred that the master servers have a firewall 40 machine which is the entry point of data and messages into these computers, and a gateway machine which is a system coordinator and message processor.

### 10 **Third-Party Computers**

In one embodiment, an Execution Command 52 optionally requires the Clearinghouse 14 and the Execution Platform 38 to communicate with at least one third-  
15 party 28 computer or database, which could be located within and proprietary to another enterprise, to conduct the user's command. For example, when the Execution Platform 38 communicates with a host server located within an educational institution or an enterprise communication center, the enterprise or third-party 28 database stores research or user-customized account data which is accessed in order to complete the user's Execution  
20 Command 52.

### **Rule-Modules and Enterprise Communication Centers**

A specific embodiment of how invoking Rule-Modules 50 results in Pattern Data 54 being used in conjunction with Execution Commands 52 will now be described. In  
25 this embodiment, the user's cell phone functions as a personal digital assistant containing a networked thin-client and a web browser (collectively referred to in this embodiment as the "PDA"). The PDA's voice-capable cell phone serves as the BIA 16 by using voice patterns as the biometric sample 62 for identification of the user by a Subset Indicator 13 located within an enterprise 28 database at an enterprise communication center.

30 Using his cell phone, the user calls the enterprise communication center from his car. The user is prompted via a challenge-response system to provide a voice biometric



sample 62. An example of how this works would be to have an automated attendant challenges the user by prompting him to vocally articulate several randomly selected words or a randomly selected phrase, into the BIA 16 within the cell phone. In this case, the BIA 16 is the cell's phone microphone. The user's vocal articulations of the words or phrases capture the user's voice patterns and constitute the biometric sample 62 submitted to a Subset Indicator 13 in order for the user to be biometrically identified. Upon the successful identification of the user by the Subset Indicator 13, the user's User ID Code is forwarded by the Subset Indicator 13 to a Subset Rule-Modules Clearinghouse 15, similarly located within an enterprise 28 database at the enterprise communication center. Optionally, the enterprise 28 database forwards its enterprise 28 identification data to the Master Indicator 12 so that it is separately identified by a remote, trusted server within the system. In this embodiment, once the user and the enterprise 28 are successfully identified, the user's User ID Code and the enterprise identification code, respectively, are forwarded to the Subset Clearinghouse 15.

In this embodiment, the user has pre-designated authorization within the Subset Clearinghouse 15 that the DPC 10, upon its having successfully identified the enterprise 28, is permitted to forward the user's Universal Access Command to that particular enterprise communication center so that the enterprise's 28 database can assume the role of a proxy terminal on behalf of the user. The Universal Access Command is unique to each user and serves to enable access to all enterprise or third-party 28 databases and Execution Platforms 38, along with the Internet locations of the enterprise or third party 28, denoted as IP Addresses or Uniform Resource Locators (URLs) and the like, to which the user has pre-designated access privileges.

The DPC 10 forwards the user's Universal Access Command to the enterprise 28 database. The enterprise 28 database in turn uses the Universal Access Command to generate one-time usage Random Key Numbers (RKN), and to forward these Random Key Numbers to each and every one of the third-party 28 database URL locations which are relevant to the user, inclusive of the enterprise 28 databases within the enterprise communication center being used to handle the user's electronic communications in this embodiment. The third party 28 databases and the enterprise 28 databases will store the Random Key Number in Random Access Memory (RAM), and will erase them when the

user's log-on session terminates. These Random Key Numbers are preferably sent from the enterprise **28** database to the other third-party **28** databases as encrypted 128-bit random numbers. The third party **28** databases each decrypt the Random Key Number and forward to the enterprise communication center all of the data relevant to the user. At this point, the enterprise **28** communication center's operator consoles are permitted to display or present all such URLs as text or preferably as visual icons for usage by the authorized operator at the enterprise communication center.

In this embodiment, the user has previously designated his user-customized Rule-Modules **50** in the Subset Clearinghouse **15** to display any or all related enterprise or third-party **28** database Pattern Data **52** and Execution Commands **54** in a grouped manner. In this embodiment, the Subset Clearinghouse **15** invokes user-customized rule-modules **50** that specify the accessing, processing and display of user-customized electronic communications. In this case, the display occurs on the operator's computer console screen at the enterprise communication center.

The user's Rule-Modules **50** designate that: all account data and product preferences relevant to the enterprise be grouped together and represented by the presentation of a single "messaging" icon or graphic on the BIA **16** display screen **6**, and; all of the user's purchasing patterns, Internet browsing patterns, account payment schedules, and physical access privileges related to the given enterprise be presented in a text and icon screen display to the designated operator at the enterprise communication center. There are multiple operators at the enterprise communication center who handle inbound electronic communications and initiate outbound electronic communications on behalf of the enterprise. Each operator has an associated operator console that includes a personal computer or workstation and a telephone headset.

Once the user's electronic communication is received at the enterprise communication, the user's biometric identification and associated rule-modules **50** automatically invoke customized queuing and routing of the user's electronic communications. In this embodiment, the user's large purchasing volumes and good credit profile, warrant high prioritization for handling the user's electronic communication. The user's electronic communication is given both: preferential queuing for faster-response times, and; preferential routing to an operator trained in handling

premier customers. This also enables the enterprise communication center to improve its work load balancing by providing flexible routing schemes based on the number of active operator consoles, comparative delay times, communication center service level commitments or other similar considerations.

5           In this embodiment, once the destination operator console has been designated, the rule-modules **50** customized for that user, encapsulating all of the information necessary for an operator to service the user customer, are displayed on the operator's console in several formats, including: dialogue or email scripts including automated responses; physical access privileges and authorization charts; medical data and  
10   emergency contact lists; call flow information; product purchasing patterns and pricing information, and; demographic data. The rule-modules **50** incorporate data from several recent interactions by enterprise representatives with the customer, including: an update on cable TV repairs in the field; physical access security service upgrades for the user's home; a recent purchase of flower arrangements for the user's wife, and; an on-line  
15   physical examination, including electro-cardiogram and blood pressure measurements, and changes in the user's medications regime.

          At this time, the console operator checks with the user to ensure: that he is satisfied with the new cable service; that he has complied with the day's medication regime, with the operator thereby scheduling an automated email and phone call reminder  
20   to the user that, per his physician's previously authorized instructions, his medicine dosages will change in two days, and; that he has successfully entered his home earlier in the day per the physical access security upgrade. The operator thereby updates the user's customized files in the enterprise communication center database **28**. The user then decides to order another floral arrangement, and the operator transfers the call to an  
25   automated attendant which, having the user's identification already established, employs a user-customized voice-recognition system to process the order. This system permits the user to say: "Mom", and the system invokes the user's customized rule-modules **50** to bring up the previously stored floral preferences, address, phone number, availability times for the user's mother, and; "Visa™ charge", and the system can invoke the user's  
30   previously stored credit account data to process the purchase.

In this embodiment, the user further says: “Orlando Hilton, December 3<sup>rd</sup> through 5<sup>th</sup>”, and the system automatically contacts the third-party **28** Hilton reservations database. Invoking the previously stored user-customized rule-modules **50**, the user’s preferences for room accommodations, room service food preferences and Hilton rewards-linked charge account are selected by the third-party **28** Hilton database to process the reservation. Once the user’s charge has been approved, the third-party **28** Hilton database automatically logs: the user’s newly accrued Hilton rewards points, and; the user’s physical access privileges with the Orlando Hilton’s Subset Clearinghouse **15** so that, upon arrival, the user can access his room, the health spa, and the garage.

In this embodiment, at this point the user has arrived at his home and reaches his front door. The user says: “Home access”, and using Global Positioning System (“GPS”), the BIA’s **16** location, and the user’s biometric identification, the enterprise communication center’s automated attendant now confirms the user is at the front door to his home. The third-party enterprise **28** communication center’s database sends a Random Key Number to the URL of the electrical apparatus controlling the lock/unlock function at the front door, along with the user’s electronic communication request to enter the physical space. An Execution Platform **38** located at this URL: provides the DPC with the front door’s embedded BIA **16** hardware identification code, and; queries the DPC **10** to validate the Random Key Number it has received. If the DPC **10** confirms that the BIA **16** hardware identification code and the Random Key Number are current and valid, the DPC **10** invokes the access privileges for that user. The DPC **10** provides this data to the URL, along with validation of the Random Key Number. In this way, the user’s front door, using an electromagnetic repulsion gating mechanism, is automatically unlocked, his home alarm system is disarmed, and he is permitted to enter his home. Preferably for security, this particular Random Key Number would be good for only one on-line session by the user. Once inside his home, the user’s front door is automatically locked again using an electromagnetic attraction gating mechanism, and his home alarm system is automatically re-armed.

In another embodiment, should the user have had concerns for his safety upon arrival at his house, he could used the BIA **16** in his cell phone to vocally articulate a special word, code or phrase which would have alerted the enterprise communication

center to a potential emergency situation. The enterprise **28** databases would then automatically contact local authorities to dispatch assistance to the user's location, along with providing notification of any user-customized Rule Modules **50** pertaining to medical care, insurance coverage and the like.

5           In essence, in this embodiment, via the user's voice pattern biometric **62** log-on, a thin-client PDA without resident user-customized data and without extensive resident software, is enabled to employ an enterprise **28** database as its proxy terminal in order to perform sophisticated on-line computing capabilities that are customized for the user, complete with user-customized electronic communication accessing, processing and  
10          presentation. Further, the enterprise communication center was enabled to customize its handling of the user's electronic communications, and deliver services more quickly and more accurately to the user.

#### **Rule-Modules and Electronic Communications**

15           Another specific embodiment of how invoking Rule-Modules **50** results in Pattern Data **54** being used in conjunction with Execution Commands **52** will now be described. A user logs on by submitting their biometric to a BIA incorporated into a public kiosk. In this embodiment, the public kiosk itself is a computer terminal containing a networked thin-client and a web browser (collectively referred to in this embodiment as the "kiosk").  
20          The BIA **16** forwards the user's bid biometric sample **62** to the DPC **10** for identity verification. Once the user is successfully identified by a Master Identicator **12**, the user's User ID Code is forwarded to the Master Rule-Modules Clearinghouse **14**. Optionally, the BIA **16** also forwards its BIA hardware identification code to the DPC **10** for identification of the BIA **16** by the Master Identicator **12**. In this embodiment, once the  
25          BIA **16** and the user are successfully identified, the BIA hardware identification code is forwarded to the Clearinghouse **14** along with the user's User ID Code. The Clearinghouse **14** is able to geographically and electronically locate the user via either the BIA hardware identification code, or the Internet Protocol (IP) Address (well known in the art).

30           Once the user logs on to the BIA **16** at the kiosk and is successfully identified by the Master Identicator **12**, the DPC **10** forwards the user's Universal Access Command to

the BIA 16. The Universal Access Command identifies all enterprise or third-party 28 databases and Execution Platforms 38, along with the Internet locations of the enterprise or third party 28, denoted as IP Addresses or Uniform Resource Locators (URLs) and the like, to which the user has access privileges.

5 In an embodiment, the DPC 10 forwards to the kiosk a user-customized display, presenting visual icons representing URLs for viewing by the user via the kiosk screen. In this embodiment, the following icons are presented to the user: a “Calendaring” icon, representing the user’s centralized scheduling programs and customized scheduling; a  
10 “Messaging” icon, representing the user’s centralized Internet accounts for email, voicemail, and fax; an “Academics” icon, representing the user’s private academic coursework examinations account; a “Medical” icon, representing the user’s centralized private health and medical records; a “Reading” icon, representing the user’s centralized electronic books accounts; a “Games” icon, representing the user’s centralized Internet game accounts; a “Word Processing” icon, representing the user’s centralized accounts  
15 for word processing programs and user-edited content, and; a “Buddy List” icon, representing the user’s centralized instant electronic messaging accounts.

The DPC 10 forwards to the BIA 16 a unique, one-time usage Random Key  
Number (RKN), optionally one for each and every one of said enterprise or third-party 28 database Internet locations which are relevant to the user. The BIA 16 will store the  
20 Random Key Number in Random Access Memory (RAM), and will erase them when the user’s log-on session terminates. These Random Key Numbers are preferably sent from the DPC 10 to the BIA 16 as encrypted 128-bit random number. The BIA 16 decrypts the Random Key Number and forwards it to the kiosk. At this point, the kiosk is permitted to display or present all such URLs for the user as text or preferably as visual icons.

25 Note the user can have previously designated his Rule-Modules 50 in the Clearinghouse 14 to display any or all such enterprise or third-party 28 database locations in a grouped manner. In this embodiment, for example, the user’s Rule-Modules 50 can designate that all email, voicemail, and fax URLs be grouped together and represented by the presentation of a single “messaging” icon or graphic.

30 In this embodiment, when the user clicks on a particular icon and seeks to log into a particular URL of an enterprise or third-party 28 database, or to all of the URLs for

enterprise or third-party **28** databases represented by that icon, the kiosk or the DPC **10** sends the Random Key Numbers to all of the respective URLs designated by the icon, along with the user's electronic communication request. Execution Platforms **38** located at each of these URLs query the DPC **10** to validate the Random Key Number it has  
5 received. If the DPC **10** confirms that the Random Key Number is current and valid, the DPC **10** invokes each Execution Platform **38** pertinent to all of the user's relevant URL account number and access privileges for that enterprise or third-party **28** database. The DPC **10** provides this data to the URL, along with validation of the Random Key  
Number. In this way, the user is automatically permitted by each of the respective URL  
10 Execution Platforms **38** to access that URL and its associated enterprise or third-party **28** databases.

Also in this embodiment, the user's Rule-Modules **50** specify that the BIA **16** location can be used by the Clearinghouse **14** to enable the Clearinghouse **14** to automatically customize certain electronic communications for the user in real-time. For  
15 example, in this embodiment, the user clicks on the "Calendaring" icon. The kiosk requests the DPC **10** to access the user's Rule-Module **50** in the Clearinghouse **14** governing customized scheduling data. The relevant Rule-Module **50** uses the BIA's **16** location along with the user's Rule-Modules **50** to access third-party Execution Platforms **38** and enterprise or third-party **28** databases that optionally forward to the kiosk user-  
20 customized, geographically-specific scheduling data for presentation to the user. Such scheduling data includes where in the local area the user can find their pre-registered preferences for culture, travel accommodations, and business manifested in locally available radio stations, hotels, films, theatres, museums, business events, companies in  
which the user might be interested, book readings, university lectures, friends whom the  
25 user can want to contact, and local sales calls the user can wish to make. Further, the user's calendaring priorities, highlighting local appointments, can be displayed for their review. In this way, the user is immediately familiarized with the locality in which the user finds himself using a BIA **16**, with the scheduling data automatically reflecting their customized, personal priorities.

30 In this embodiment, the user's Rule-Modules **50** stipulate that even when the user is not logged onto a network, certain of the user's Rule-Modules **50** are to function on an

automated basis, such as periodically updating the DPC's **10** central retrieval of the user's email, voicemail and fax messages. In this way, when the user does actually log-on seeking to access this data, it is also available from the DPC **10** in real-time.

Further, in this embodiment, the user on the "Messaging" icon to access all of  
5 their email, Internet fax and Internet voicemail messaging accounts. The "Messaging"  
icon, represents all of the URLs related to the user's messaging accounts which have been  
grouped by the Clearinghouse **14** according to the user's Rule-Modules **50**. The user has  
previously stored with the Clearinghouse **14** their messaging account URLs along with  
their respective account names and passwords. Once the user clicks on the kiosk's "get  
10 new messages" icon, the kiosk requests the DPC **10** to access the user's messaging  
accounts. Once this request is received by the DPC, the Clearinghouse **14** invokes the  
user's Rule-Modules **50** governing message requests. Assuming the user wants to  
simultaneously obtain all of their messages at once, the DPC **10** in turn sends a  
HyperText Transfer Protocol (HTTP) "get" message command for each URL, thereby  
15 enabling the DPC **10** to retrieve all of their email, Internet voicemail and Internet fax  
account messages at once. (Note that HTTP is the protocol currently used to transfer  
information from Internet third-party databases **28** to client browsers.) These messages  
are the Pull Data retrieved by the DPC. The DPC **10** filters the HyperText Markup  
Language (HTML) to retain only user-relevant message contents and forward this to the  
20 kiosk for presentation to the user.

In the embodiment, the user also seeks to simultaneously retrieve their standard  
voicemail messages. This can be accomplished by the user storing their voicemail  
account numbers and respective passwords as part of Execution Commands **52** in the  
Clearinghouse. Once the user signals the kiosk to "get standard voicemail messages", this  
25 request is forwarded to the DPC **10** which places dial-up calls to the relevant voicemail  
systems in order to record and digitize the voicemail message playbacks. The DPC **10**  
forwards these messages to the PDA for presentation to the user either as text or real  
audio.

In this embodiment, one of the user's invoked Rule-Modules **50** that provide  
30 calendaring functions, the kiosk automatically presents the user with an "Academics"  
icon for notification that they must complete their university's on-line coursework



examination. In this embodiment, the DPC 10 provides the BIA 16 with a packet containing the Universal Access Command, the Random Key Number, and any other relevant user-unique network credentials for the university's restricted database. The BIA 16 decrypts this packet and forwards it to the kiosk for display to the user. The user clicks on the displayed icon representing the URL for the third-party Execution Platform 38 and databases at which resides the examination for which the user has pre-registered. The kiosk forwards Random Key Number to the URL, and the resident Execution Platform 38 queries the DPC 10 to authenticate the validity of the Random Key Number. If the DPC 10 confirms the validity of the Random Key Number to the URL, the user is enabled to access the third party database and take their electronically stored course exam. Preferably for security, this particular Random Key Number would be good for only one on-line session by the user with the relevant third-party database, in this case being the university server on which is stored the course examination.

In this embodiment, the user also clicks on the "Medical" icon to access their private health records in order to check on medical tests which their physician had completed that morning, along with accessing a customized collection of current medical news. Preferably, while the user was logged off, the user's relevant Rule-Module 50 automatically and periodically directed the Execution Platform 38 to collect this data from third-party databases 28. In this instance, the DPC 10 provides the BIA 16 with a packet containing the Universal Access Command, the Random Key Number, and any other relevant user-unique network credentials for each third party database 28 containing the user's medical records and health news updates. The BIA 16 decrypts this package and forwards the data to the kiosk for display to the user. The displayed "Medical" icon represents the URLs of the respective third-parties' Execution Platforms 38 and databases at which resides the user's customized medical information. The kiosk forwards a Random Key Number to each of said URLs, and the respective Execution Platforms 38 query the DPC 10 to authenticate the validity of each of the Random Key Numbers. For each Random Key Number validation provided by the DPC 10 to the respective URL, the user is enabled to access the respective third party database for presentation of the user's private medical data.

Additionally, in this embodiment, the user clicks on the “Reading” icon to access third-party databases **28** storing certain electronic books for which the user has pre-paid, some of which are a customized selection of books related to the user’s coursework and some of which are a customized selection of new best sellers. Preferably, while the user was logged-off, these customized book selections were automatically and periodically collected from third-party databases **28** by the Clearinghouse **14** based on the user’s Rule-Module **50** to reflect the user’s interests. In this instance, the DPC **10** provides the BIA **16** with a packet containing the Universal Access Command, the Random Key Number, and any other relevant user-unique network credentials for each third party database containing the electronic books for which the user has pre-paid. The BIA **16** decrypts this package and forwards the data to the kiosk for display to the user. The displayed “Reading” icon represents the URLs of the respective third-parties’ Execution Platforms **38** and databases at which resides the user’s customized selection of books. The kiosk forwards a Random Key Number to each of said URLs, and the respective Execution Platforms **38** query the DPC **10** to authenticate the validity of each of the Random Key Numbers. For each Random Key Number validation provided by the DPC **10** to the respective URL, the user is enabled to access the respective third party database for presentation of the user’s electronic books’ content. In this embodiment, the user downloads the electronic books to a hand-held display panel, such as the Rocket-eBook™.

In this embodiment, the user also clicks on the “Games” icon to access an interactive Internet game site. However, as this user is actually a subordinated user on their parents’ primary user accounts, the user’s related Rule-Modules **50** are subordinated to their parents’ Internet access filtering Rule-Modules **50** which restrict the user’s viewing and use of Internet games when the user is not at home. In this case, the location of the BIA **16** notifies the DPC **10** that the user is attempting Internet game access from a public kiosk away from home, and the DPC **10** automatically responds with notification that user access to Internet games is denied.

Further, the user in this embodiment clicks on the “Word Processing” icon to access and edit a short story he is in the process of writing. In this instance, the BIA **16** is automatically provided by the DPC **10** with a packet containing the Universal Access

Command, the Random Key Number, and any other relevant user-unique network credentials for the enterprise or third-party **28** database containing the user's word processing programs and word processing content. The BIA **16** decrypts this package and forwards the data to the kiosk for display to the user. The displayed "Word Processing" icon represents the URL of the enterprise or third-party **28** Execution Platform **38** and database at which resides the user's word processing software and content. The kiosk forwards a Random Key Number to said URL, and the respective Execution Platform **38** queries the DPC **10** to authenticate the validity of the Random Key Number. With the DPC's **10** validation to the URL of the Random Key Number, the user enabled to access the respective third party database for editing of the user's word processing content. It should be noted that for preferred security, this particular Random Key Number would be good for only one on-line session by the user with this enterprise or third-party **28** database.

In this embodiment, the user also clicks on the "Buddy List" icon to access his instant electronic messaging accounts. In this instance, the BIA **16** is automatically provided by the DPC **10** with a packet containing the Universal Access Command, the Random Key Number, and any other relevant user-unique network credentials for each third party database containing the instant electronic messaging accounts to which the user belongs. The BIA **16** decrypts this package and forwards the data to the kiosk for display to the user. The displayed "Buddy List" icon represents the URLs of the respective third-parties' Execution Platforms **38** and databases at which reside the user's instant electronic messaging accounts. The kiosk forwards a Random Key Number to each of said URLs, and the respective Execution Platforms **38** query the DPC **10** to authenticate the validity of each of the Random Key Numbers. For each Random Key Number validation provided by the DPC **10** to the respective URL, the user is enabled to access the respective third party database for instant messaging with any other on-line members of his buddy list. In this embodiment, the user's Rule-Modules **50** governing the sending of instant messages by user instruct that these messages are automatically appended with both his personal visual trademark icon and digital certificate, both of which are stored in the Clearinghouse **14**. This provides both user-customized visually

graphical and cryptographically secure confirmation to recipients that the instant messages are authentically from the user.

In essence, in this embodiment, a public kiosk without resident user-customized data and without extensive resident software, has been automatically and nearly instantly transformed, via a user's biometric log-on, into a terminal receiving on-line sophisticated computing capabilities that are customized for the user, complete with user-customized electronic communication accessing, processing and presentation. The user has been able to personalize: their own Internet web portal displaying all URLs with which the user has pre-registered for access privileges; topical recommendations for local activities, events and people that reflect their priorities; their Internet web site preferences, or "bookmarks"; and temporary DPC 10 downloading to the BIA 16 for RAM storage of their Internet "cookies", or that set of data that an Internet website server provides to a user each time the user visits the website. In this invention, the Clearinghouse's 14 remote servers save the information the cookie contains about the user, as a text file stored in the Netscape or Explorer system folder, and is able to temporarily download this data to whatever BIA 16 the user is currently logged onto.

In sum, the invention constructs and presents for the user, on any terminal equipped with a BIA 16 that the user is using, a user-customized gateway to a public network 18 containing their desired bookmarks, their personalized search engine and their customized web page directory. This is the user's personal Internet 18 web page "portal" which is a starting point for their electronic communications, including electronic mail, Internet 18 web browsing or "surfing", and the like.

In all of these electronic communications, this invention provides the user the ability, with only a single log-on, to automatically enter all restricted or confidential enterprise or third-party databases 28 throughout a public network 18 to which the user has pre-authorized access privileges.

Once the user time the user has completed their Internet 18 usage of the BIA 16 for this on-line session, all of the data stream from their on-line session, including all new cookies provided by third parties on behalf of the user and all new data on their browsing activity, is batched and forward to the DPC 10 for downloading, storage, along with any

updating and revising of the user's Rule-Modules **50** within the Clearinghouse **14**.

Alternatively, the user's session on-line data stream is monitored in real-time by the DPC **10** for central server downloads and real-time revisions to the user's Rule-Modules **50**.

## 5    **Decryption Platform**

In a preferred embodiment, all messages the Data Processing Center **10** receives, with the exception of those not transmitted via a BIA **16**, contain a BIA **16** hardware identification code, a sequence number, and a Message Authentication Code (MAC).

MACs, also known as cryptographic checksums, are well known in the computer

10 industry, and are used to assure that any changes to the content of the message will be detectable by the entity receiving the communication. The Decryption Platform **22** validates the message's MAC and checks the sequence number for that particular BIA. If the Decryption Platform **22** determines that both the MAC and the sequence number are valid, the Decryption Platform **22** uses the unique secret key for that particular BIA **16** to  
15 decrypt the message. For the decryption to function properly, the Decryption Platform **22** must contain a copy of each BIA's **16** DUKPT key table.

If the decryption operation fails, or if the MAC check fails, the message is considered an invalid message. The Decryption Platform **22** logs a warning to the logging facility (LF), terminates processing for the message, and returns an error message  
20 to the originating BIA **16**.

Before the Decryption Platform **22** replies to a message that includes a response key, it encrypts the response message with that response key. The Decryption Platform **22** also generates a MAC for the response and appends it to the message.

Preferably, error messages are not encrypted although the Decryption Platform **22**  
25 does include a MAC for message authentication. Such messages never include confidential information. However, most response messages include a status or response codes that can indicate whether the request succeeded or not. For example, when the Execution Platform **38** declines a communication for a specific reason, it does not return an error message, it returns a normal communication response message with a response  
30 code set to "failed".

## Gateway Platform (GP)

The Gateway Platform **26** serves as an intermediary between redundant Identifier **12** and redundant Clearinghouse **14** servers, routing electronic communications from servers on overload to servers that have available capacity. The

5 Gateway Platform **26** also periodically queries servers to ensure that are operative and to alert the system administrator is any server is inoperative.

## Firewall (FW)

The firewall **40** provides a first line of defense against network viruses and computer hackers. All communication links into or out of the Identifier **12** and

10 Clearinghouse **14** server sites first pass through a secure firewall **40** Machine.

Preferably, the firewall **40** Machine, an Internet–localnet router, only handles messages destined for the Gateway Platform **26** machines.

BIA–equipped terminals send packets to Identifier **12** and Clearinghouse **14** server sites via modem, X.25, or other communication medium. The Identifier **12** and

15 Clearinghouse **14** server sites rely on a third-party to supply the modem banks required to handle the volume of calls and feed the data onto the DPC **10** backbone.

For communications between Identifier **12** and Clearinghouse **14** server sites, the FW Machines send out double–length DES encrypted packets. The server site LAN component handles the encryption and decryption: the firewall **40** does not have the

20 ability to decrypt the packets.

A properly configured network sniffer acts as an intruder detector as backup for the FW. If an anomalous message is detected, the intruding messages are recorded in their entirety, an operator is alerted, and the firewall **40** is physically shut down by the sniffer.

25 The firewall **40** disallows any communications from the internal network to the rest of a public network **18**. An electronic communication message requires about 400 bytes and registration packets require about 10 to 20 KB. To handle 1000 electronic communications per second and 1 registration packet per second, the firewall **40** machines are able to process about 400 KB per second .

## **Execution Platform**

In a preferred embodiment, an Execution Command of a Rule-Module **50** causes an electronic communication to be executed by the Execution Platform **38**. The Execution Platform **38** can be on a database which is located within the DPC **10** itself, or  
5 it can be co-located with a third-party database **28** that is external to the DPC **10**. In the event that a designated third-party database **28** cannot be contacted for the electronic communication to be completed, the communication is “declined”.

## **Logging Facility**

In a preferred embodiment, the logging facility **42** logs all electronic  
10 communication attempts, whether successful or not, to write-once media, so that a record is kept of each communication and each error that has occurred during the operation of the Identifier **12**.

From the foregoing, it will be appreciated how the objectives and features of the  
15 invention are met.

First, the invention provides a computerized electronic communications system that is tokenless. As such, this system eliminates the need for a user to possess and present any personalized man-made tokens, in order to authorize, send or receive a user-customized electronic communication.

20 Second, the invention provides a computerized electronic communications system that is capable of verifying a user’s unique personal identity, as opposed to verifying the user’s possession of personalized objects and information.

Third, the invention provides a cost-effective computerized electronic communications system that is practical, convenient, and easy use.

25 Fourth, the invention provides a system of secured access to a computer system that is highly resistant to fraudulent electronic communication authorization attempts by unauthorized users.

Fifth, the invention provides a tokenless system for ensuring that users have the portability and mobility to gain immediate access to their electronic communications via any network-connected interface, regardless of the resident capabilities of the computing device the user is using to interface with the computer network and a central server.

5 Sixth, this invention provides a user-customized “portal” or gateway to the Internet including their desired bookmarks, their personalized search engine and their customized web page directory.

Seventh, this invention provides enhanced security by maintaining authenticating data and carrying out the identity verification operations at a point in the system that is  
10 operationally isolated from the user requesting access, thereby preventing the user from acquiring copies of the authenticating data or from tampering with the verification process.

Eighth, this invention enables a user to enter and update their customized data in a centralized database.

15 Ninth, this invention enables primary users to both register and govern the electronic communications of subordinated users.

Tenth, this invention provides the ability for a third-party database to be identified by the computer system, wherein the user is notified that they have accessed the correct third-party database.

20 Although the invention has been described with respect to a particular computer system having rule-module clearinghouse and method for its use, it will be appreciated that various modifications of the apparatus and method are possible without departing from the invention, which is defined by the claims set forth below.



## CLAIMS

What is claimed is:

- 5 1. A method for tokenless biometric authorization of an electronic communication, using a biometric sample, a master electronic identicator, and a public communications network, wherein said method comprises:
  - a. an electronic communication formation step, wherein at least one communication comprising electronic data is formed;
  - 10 b. a user registration step, wherein a user electronically submits a registration biometric sample taken directly from the person of the user;
  - c. a public network data transmittal step, wherein the registration biometric sample is electronically transmitted to a master electronic identicator via a public communications network, said master electronic identicator comprising a computer database which electronically stores all of the registration biometric samples from all of the registered users;
  - 15 d. a user registration biometric storage step, wherein the registration biometric sample is electronically stored within the master electronic identicator;
  - e. a bid biometric transmittal step, wherein a bid biometric sample, taken directly from the person of the user, is electronically transmitted to at least one electronic identicator;
  - 20 f. a user identification step, wherein an electronic identicator compares the bid biometric sample to at least one registration biometric sample previously stored in an electronic identicator, for producing either a successful or failed identification of the user;
  - 25 g. an electronic communication authorization step, wherein upon a successful identification of the user by an electronic identicator, at least one electronic communication is authorized for execution;
- 30 wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic stripe cards.

2. The method of claim 1 wherein during the bid biometric transmittal step, the electronic identifier comprises any of the following: a master electronic identifier, and; a subset electronic identifier, said subset electronic identifier comprising a computer database which electronically stores a subset of all of the registration biometric samples from registered users.
3. The method of claim 1 wherein any steps of said method occur in any of the following chronological sequences: simultaneously, and; separated by any increment of time including seconds, minutes, hours, days, weeks, months, and years.
4. The method of claim 1, further comprising:
  - a. a first comparison step, wherein a subset electronic identifier compares the bid biometric sample taken directly from the person of the user with at least one registration biometric sample previously stored in the subset electronic identifier for producing either a successful or failed identification of the user;
  - b. a public network data transmittal step, wherein if the subset electronic identifier returns a failed identification result, the bid biometric sample is electronically transmitted via a public communications network to a master electronic identifier;
  - c. a second comparison step, wherein a master electronic identifier compares the bid biometric sample to at least one registration biometric sample previously stored in the master electronic identifier for producing either a successful or failed identification of the user;
  - d. a communication authorization step, wherein upon the earliest successful identification of the user by an electronic identifier, at least one electronic communication is authorized for execution;
- wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic swipe cards.
5. The method of claim 1 further comprising:
  - a. an enterprise registration step, wherein an enterprise electronically submits registration identity data;

- b. a public network data transmittal step, wherein the enterprise registration identity data is electronically transmitted to a master electronic identicator via a public communications network;
- c. an enterprise registration identity data storage step, wherein the enterprise registration identity data is electronically stored within the master electronic identicator;
- d. an enterprise bid identity data network transmittal step, wherein enterprise bid identity data is electronically transmitted to at least one electronic identicator, said electronic identicator comprising any of the following: a subset electronic identicator and a master electronic identicator;
- e. an enterprise identification step, wherein an electronic identicator compares the enterprise bid identity data with enterprise registration identity data previously stored in the electronic identicator, for producing either a successful or failed identification of the enterprise;
- f. an electronic communication authorization step, wherein upon a successful identification of the enterprise by an electronic identicator and a successful identification of the user by an electronic identicator, at least one electronic communication is authorized for execution;

wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic swipe cards.

- 6. The method of claim 5 wherein any steps of said method occur in any of the following chronologies: simultaneously, and; separated by any increment of time including seconds, minutes, hours, days, weeks, months, and years.

7. The method of claim 5 further comprising:

- a. a first comparison step, wherein a subset electronic identicator compares the enterprise bid identity data with enterprise registration identity data previously stored in the subset electronic identicator for producing either a successful or failed identification of the enterprise;

- b. a public network data transmittal step, wherein if the subset electronic identifier returns a failed identification result, the enterprise bid identity data is electronically transmitted via a public communications network to a master electronic identifier;
- 5 c. a second comparison step, wherein a master electronic identifier compares the enterprise bid identity data with enterprise registration identity data previously stored in the master electronic identifier for producing either a successful or failed identification of the enterprise;
- 10 d. a communication authorization step, wherein upon the earliest successful identification of the user by an electronic identifier and the earliest successful identification of the enterprise by an electronic identifier, at least one electronic communication is authorized for execution;
- wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or
- 15 magnetic swipe cards.
8. The method of claim 1 wherein the biometric sample taken directly from the person of the user comprises any of the following: a fingerprint, a facial scan, a retinal image, an iris scan, and a voice print.
- 20 9. The method of claim 5 wherein the enterprise is a legally formed entity comprising any of the following: a corporation, a foundation, a non-profit organization, a sole proprietorship, a limited liability company, and a partnership.
10. The method of claim 1 wherein during the user identification step, the user provides a personal identification code to the electronic identifier along with a bid biometric
- 25 sample for purposes of identifying the user.
11. The method of claim 1 further comprising a user re-registration check step, wherein the user's registration biometric sample is compared by at least one electronic identifier to previously registered biometric samples wherein if a match occurs, the electronic identifier is alerted to the fact that the user has attempted to re-register.
- 30 12. The method of claim 10 further comprising a biometric theft resolution step, wherein a user's personal identification code is changed when the user's registered biometric sample is determined to have been fraudulently duplicated.

13. The method of claim 1, wherein an electronic communication comprises any of the following: an email communication, a telephone call, an encrypted data packet, an Internet telephony communication, and a facsimile.

14. The method of claim 1, wherein during the communication authorization step, any of the following is used: an intranet, an extranet, a local area network, a wide area network, a cable network, a wireless network, a telephone network, the Internet, an ATM network, or an X.25.

15. The method of claim 5 wherein enterprise registration identity data comprises any of the following: an alpha-numeric code, a hardware identification code, an email address, a financial account, a biometric of an authorized enterprise representative, a non-financial data repository account, a telephone number, a mailing address, a digital certificate, a network credential, an Internet protocol address, a digital signature, an encryption key, and an instant messaging address.

16. The method of claim 1 wherein the communication authorization step further comprises a third-party communications step, wherein the electronic identifier electronically communicates with a third-party server in order to authorize the electronic communication.

17. The method of claim 1 further comprising:

- a. a rule-module formation step, wherein a rule-module is formed in an electronic clearinghouse, said rule-module further comprising at least one user-customized pattern data which is associated with at least one execution command;
- b. a rule-module invocation step, wherein upon a successful identification of the user, at least one previously designated user-customized rule-module is invoked;
- c. an electronic communication execution step, wherein upon the invocation of a user-customized rule-module, at least one electronic communication is executed.

18. The method of claim 17 wherein pattern data comprises any of the following: a user unique identification code; demographic information; an email address; a financial

account; a biometric; internet browsing patterns; a non-financial data repository  
account; a telephone number; a mailing address; purchasing patterns; database  
authorization fields; financial credit report data; a call-center queuing, routing and  
automated response program; an email-center queuing, routing and automated  
5 response program; data on pre-paid accounts or memberships for products or services;  
electronic data utilization patterns; employee status; job title; data on user behavior  
patterns; a digital certificate; a network credential; an internet protocol address; a  
digital signature; an encryption key; an instant messaging address; user-customized  
medical records; an electronic audio signature; and an electronic visual signature.

10 19. The method of claim 17 wherein said execution commands further comprise user-  
customized instructions for executing any of the following: accessing of stored  
electronic data, processing of electronic data, and presentation of electronic data.

20. The method of claim 19 wherein user-customized accessing of stored electronic data  
further comprises execution of any of the following: activating of an Internet-  
15 connected device; accessing of a secured physical space, and unlocking of a secured  
physical device.

21. The method of claim 19, wherein user-customized processing of electronic data  
further comprises invoking any of the following: a digital certificate, an identity  
scrambler, a database authorization field, an electronic consumer loyalty or consumer  
20 rewards incentive, an electronic advertisement, an instant messaging program, real-  
time tracking of an incoming caller or an email sender, a time and attendance  
monitoring program, an emergency home alarm and personal safety notification  
program, a real-time challenge-response program, a call-center queuing prioritization  
program, a call-center routing prioritization program, an email-center queuing  
25 prioritization program, an email-center routing prioritization program, an automated  
caller or emailer response program, a call-forwarding program, and an electronic  
intelligent software program for electronic data search and retrieval.

22. The method of claim 19 wherein user-customized presentation of electronic data  
comprises any of the following: a print-out, a computer screen display, an audio  
30 message, a tactile sensation and a holographic image.

23. The method of claim 17 wherein the rule-module invocation step further comprises a third-party communications step, wherein the electronic rule-module clearinghouse communicates with one or more third-party computers in order to invoke a rule-module.

5 24. The method of claim 17, wherein user-customized pattern data is provided to the electronic rule-module clearinghouse by any of the following: the user, the electronic identifier, the electronic rule-module clearinghouse, and a user-authorized third party.

10 25. The method of claim 17, wherein user-customized execution commands are provided to the electronic rule-module clearinghouse by any of the following: the user, the electronic rule-module clearinghouse, the electronic identifier and a user-authorized third party.

26. The method of claim 17 further comprising:

- 15 a. a master rule-module storage step, wherein all of the rule-modules from all of the registered users are stored in a master rule-module clearinghouse ;
- b. a subset rule-module storage step, wherein a subset of all of the rule-modules from registered users is stored in a subset rule-module clearinghouse;
- 20 c. a rule-module invocation step, wherein upon a successful identification of the user, at least one user-customized rule-module is invoked by any of the following: a subset rule-module clearinghouse and a master rule-module clearinghouse;
- d. an electronic communication execution step, wherein upon the invocation of a user-customized rule-module, at least one electronic communication is executed.

25 27. The method of claim 1 wherein during the registration biometric network transmittal step, any of the following public networks is used: a cable network, a wireless cellular network, a wireless digital network, a telephone network, a wide area network, the Internet, an ATM network, and an X.25 connection.

30 28. The method of claim 1 wherein during the public network data transmittal step, any of the following networks is used: a cable network, a wireless cellular network, a

wireless digital network, a telephone network, a wide area network, the Internet, an ATM network, and an X.25 connection.

29. The method of claim 26 further comprising:

- a. a first rule-module invocation step, wherein the subset rule-module clearinghouse attempts to invoke at least one user-customized rule-module;
- b. a public network data transmittal step, wherein if the subset rule-module clearinghouse fails to invoke a user-customized rule-module, the request is transmitted to a master rule-module clearinghouse via a public communications network;
- c. a second rule-module invocation step, wherein a master rule-module clearinghouse attempts to invoke at least one user-customized rule-module;
- d. an electronic communication execution step, wherein upon the earliest invocation of a user-customized rule-module, at least one electronic communication is executed.

30. The method of claim 26 wherein the master rule-module clearinghouse comprises a computer database which electronically stores all of the rule-modules for all of the registered users.

31. The method of claim 26 wherein the subset rule-module clearinghouse comprising a computer database which electronically stores a subset of all of the rule-modules for registered users.

32. A system for tokenless biometric authorization of an electronic communication, using an electronic communication input apparatus, a biometric input apparatus, and a master electronic identicator, wherein said system comprises:

- a. a communication input apparatus, further comprising a data entry device for formation of an electronic communication;
- b. a biometric input apparatus, further comprising a device for electronically scanning a biometric sample directly from the person of a user;
- c. at least one master electronic identicator, further comprising:

- i) a computer database containing all of the electronically stored biometric samples from all of the registered users;



ii) a comparator that electronically compares received a biometric sample with previously stored biometric samples to deliver either a successful or failed identification of the user;

- d. a data transmittal public network that electronically transmits data between the biometric input apparatus and a master electronic identicator;
- e. an electronic communication authorization platform that authorizes execution of at least one electronic communication upon a successful identification of the user by an electronic identicator;

wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic stripe cards.

33. The device of claim 32 wherein the master electronic identicator further comprises a computer database which: has a location which is physically remote from the site at which the user submits a biometric sample directly from his person, and; requires the use of a public communication network that enables receipt of an electronically transmitted registration biometric sample.

34. The device of claim 32 further comprising a subset electronic identicator having: a computer database containing a subset of all stored biometric samples from registered users in the computer system, and; a comparator that compares a received biometric sample with previously stored biometric samples to deliver either a successful or failed identification of the user.

35. The device of claim 32 wherein any component of said system is used in any of the following chronological sequences: simultaneously, and; separated by any increment of time including seconds, minutes, hours, days, weeks, months, and years.

36. The device of claim 34, further comprising:

- a. a first comparator, comprising a subset electronic identicator comparator that compares the bid biometric sample taken directly from the person of the user with at least one registration biometric sample previously stored in the subset electronic identicator for producing either a successful or failed identification of the user;

- b. a data transmittal public network, comprising a public communications network that electronically transmits data between the subset electronic identifier and a master electronic identifier;
- c. a second comparator, comprising a master electronic identifier comparator which, if the subset electronic identifier fails to successfully identify the user, compares the bid biometric sample to at least one registration biometric sample previously stored in the master electronic identifier for producing either a successful or failed identification of the user;
- d. a communication authorization platform, that authorizes execution of an electronic communication upon the earliest successful identification of the user by an electronic identifier;

wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic swipe cards.

37. The device of claim 34 further comprising:

- a. an enterprise data input apparatus for an enterprise to electronically input registration identity data;
- b. a data transmittal public network, further comprising a public communications network that electronically transmits data between the enterprise data input apparatus and a master electronic identifier;
- c. an electronic communication authorization platform, that authorizes execution of an electronic communication upon a successful identification of the enterprise by an electronic identifier and a successful identification of the user by an electronic identifier;

wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic swipe cards.

38. The device of claim 37 wherein any component is used in any of the following chronological sequences: simultaneously, and; separated by any increment of time including seconds, minutes, hours, days, weeks, months, and years.

39. The device of claim 37 further comprising:

- a. a first comparator, comprising a subset electronic identifier comparator that compares the enterprise bid identity data with enterprise registration identity data previously stored in the subset electronic identifier for producing either a successful or failed identification of the enterprise;
- b. a data transmittal public network, further comprising a public communications network that electronically transmits data between the subset electronic identifier and a master electronic identifier;
- c. a second comparator, comprising a master electronic identifier comparator which, if the subset electronic identifier fails to successfully identify the enterprise, compares the enterprise bid identity data with enterprise registration identity data previously stored in the master electronic identifier for producing either a successful or failed identification of the enterprise;
- d. a communication authorization platform, that authorizes execution of an electronic upon the earliest successful identification of the user by an electronic identifier and the earliest identification of the enterprise by an electronic identifier;

wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic swipe cards.

40. The device of claim 32 wherein the biometric sample taken directly from the person of the user comprises any of the following: a fingerprint, a facial scan, a retinal image, an iris scan, and a voice print.

41. The device of claim 37 wherein the enterprise is a legally formed entity comprising any of the following: a corporation, a foundation, a non-profit organization, a sole proprietorship, a limited liability company, and a partnership.

42. The device of claim 32 wherein the user further provides a personal identification code to the electronic identifier along with a bid biometric sample for purposes of identifying the user.

43. The device of claim 37 further comprising a user re-registration platform, wherein the user's registration biometric sample is compared by at least one electronic identifier to previously registered biometric samples wherein if a match occurs, the electronic identifier is alerted to the fact that the user has attempted to re-register.

5 44. The device of claim 42 further comprising a biometric theft resolution platform, wherein a user's personal identification code is changed when the user's registered biometric sample is determined to have been fraudulently duplicated.

45. The device of claim 32, wherein an electronic communication comprises any of the following: an email, a telephone call, an encrypted data packet, an Internet telephony,  
10 and a facsimile.

46. The device of claim 32, wherein the data transmittal public network further comprises any of the following: an extranet, a wide area network, a cable network, a wireless network, a telephone network, the Internet, an ATM network, or an X.25.

47. The device of claim 37 wherein enterprise registration identity data comprises any of  
15 the following: an alpha-numeric code, a hardware identification code, an email address, a financial account, a biometric of an authorized enterprise representative, a non-financial data repository account, a telephone number, a mailing address, a digital certificate, a network credential, an Internet protocol address, a digital signature, an encryption key, and an instant messaging address.

20 48. The device of claim 32 further comprising a third-party server interconnecting network, wherein the electronic communication execution platform interconnects with one or more third-party servers in order to execute the electronic communication.

49. The device of claim 32 further comprising:

- 25
- a. a rule-module clearinghouse, further comprising at least one user-customized pattern data which is associated with at least one execution command;
  - b. a rule-module invocation platform, that invokes at least one previously designated user-customized rule-module upon successful identification of the user;

- c. an electronic communication execution platform, that executes at least one electronic communication upon the invocation of a user-customized rule-module.

- 5 50. The device of claim 49 wherein pattern data comprises any of the following: a user unique identification code; demographic information; an email address; a financial account; a biometric; internet browsing patterns; a non-financial data repository account; a telephone number; a mailing address; purchasing patterns; database authorization fields; financial credit report data; a call-center queuing, routing and
- 10 automated response program; an email-center queuing, routing and automated response program; data on pre-paid accounts or memberships for products or services; electronic data utilization patterns; employee status; job title; data on user behavior patterns; a digital certificate; a network credential; an internet protocol address; a digital signature; an encryption key; an instant messaging address; user-customized
- 15 medical records; an electronic audio signature; and an electronic visual signature.
51. The device of claim 49 wherein said execution commands further comprise user-customized instructions for execution of any of the following: accessing of stored electronic data, processing of electronic data, and presentation of electronic data.
52. The device of claim 51 wherein user-customized accessing of stored electronic data
- 20 further comprises execution of any of the following: activation of an Internet-connected device; accessing of a secured physical space, and unlocking of a secured physical device.
53. The device of claim 51, wherein user-customized processing of electronic data further comprises invoking any of the following: a digital certificate, an identity scrambler, a
- 25 database authorization field, an electronic consumer loyalty or consumer rewards incentive, an electronic advertisement, an instant messaging program, real-time tracking of an incoming caller or an email sender, a time and attendance monitoring program, an emergency home alarm and personal safety notification program, a real-time challenge-response program, a call-center queuing prioritization program, a call-center routing prioritization program, an email-center queuing prioritization program,
- 30 an email-center routing prioritization program, an automated caller or emailer

response program, a call-forwarding program, and an electronic intelligent software program for electronic data search and retrieval.

54. The device of claim 51 wherein user-customized presentation of electronic data comprises any of the following: a print-out, a computer screen display, an audio message, a tactile sensation and a holographic image.

55. The device of claim 49 wherein the rule-module invocation platform is interconnected with one or more third-party computers.

56. The device of claim 49, wherein user-customized pattern data is provided to the electronic rule-module clearinghouse by any of the following: the user, the electronic identifier, the electronic rule-module clearinghouse, and a user-authorized third party.

57. The device of claim 49, wherein user-customized execution commands are provided to the electronic rule-module clearinghouse by any of the following: the user, the electronic rule-module clearinghouse, the electronic identifier and a user-authorized third party.

58. The device of claim 49 further comprising:

- a. a master rule-module clearinghouse, comprising a computer database storing all of the rule-modules for all of the registered users;
- b. a subset rule-module clearinghouse, comprising computer database storing a subset of all of the rule-modules for registered users;
- c. a rule-module invocation platform, that invokes at least one user-customized rule-module upon identification of the user, said platform comprising any of the following: a subset rule-module clearinghouse and a master rule-module clearinghouse;
- d. an electronic communication execution platform, that executes at least one electronic communication upon the invocation of a user-customized rule-module.

59. The device of claim 32 wherein the data transmittal public network further comprises: a cable network, a wireless cellular network, a wireless digital network, a telephone

network, a wide area network, the Internet, an ATM network, and an X.25 connection.

58. The device of claim 32 wherein the master electronic identicator further comprises a computer database having a location which is physically remote from the site at which the user submitted the registration biometric sample.

60. The device of claim 34 wherein the subset electronic identicator further comprises a computer database: being physically remote from the master identicator, and; capable of using any communications network for receiving the bid biometric sample.

61. The device of claim 58 further comprising:

- a. a first rule-module invocation platform, comprising a subset rule-module clearinghouse that invokes at least one user-customized rule-module;
- b. a data transmittal public network, wherein if the subset rule-module clearinghouse fails to invoke a user-customized rule-module, the request is transmitted via a public communications network to a master rule-module clearinghouse;
- c. a second rule-module invocation platform, comprising a master rule-module clearinghouse that invokes at least one user-customized rule-module;
- d. an electronic communication execution platform, that executes at least one electronic communication upon the earliest invocation of a user-customized rule-module by a rule-module clearinghouse.


62. The device of claim 58 wherein the subset rule-module clearinghouse is physically remote from the master rule-module clearinghouse.

## Abstract

This invention is a method and system for tokenless biometric authorization of an electronic communication, using a biometric sample, a master electronic identicator, and a public communications network, wherein the method includes: an electronic communication formation step, wherein at least one communication comprising electronic data is formed; a user registration step, wherein a user electronically submits a registration biometric sample taken directly from the person of the user; a public network data transmittal step, wherein the registration biometric sample is electronically transmitted to a master electronic identicator via a public communications network, said master electronic identicator comprising a computer database which electronically stores all of the registration biometric samples from all of the registered users; a user registration biometric storage step, wherein the registration biometric sample is electronically stored within the master electronic identicator; a bid biometric transmittal step, wherein a bid biometric sample, taken directly from the person of the user, is electronically transmitted to at least one electronic identicator; a user identification step, wherein an electronic identicator compares the bid biometric sample to at least one registration biometric sample previously stored in an electronic identicator, for producing either a successful or failed identification of the user; an electronic communication authorization step, wherein upon a successful identification of the user by an electronic identicator, at least one electronic communication is authorized for execution; wherein an electronic communication is biometrically-authorized without the user having to present any personalized man-made memory tokens such as smartcards, or magnetic stripe cards.



**Fig. 1**

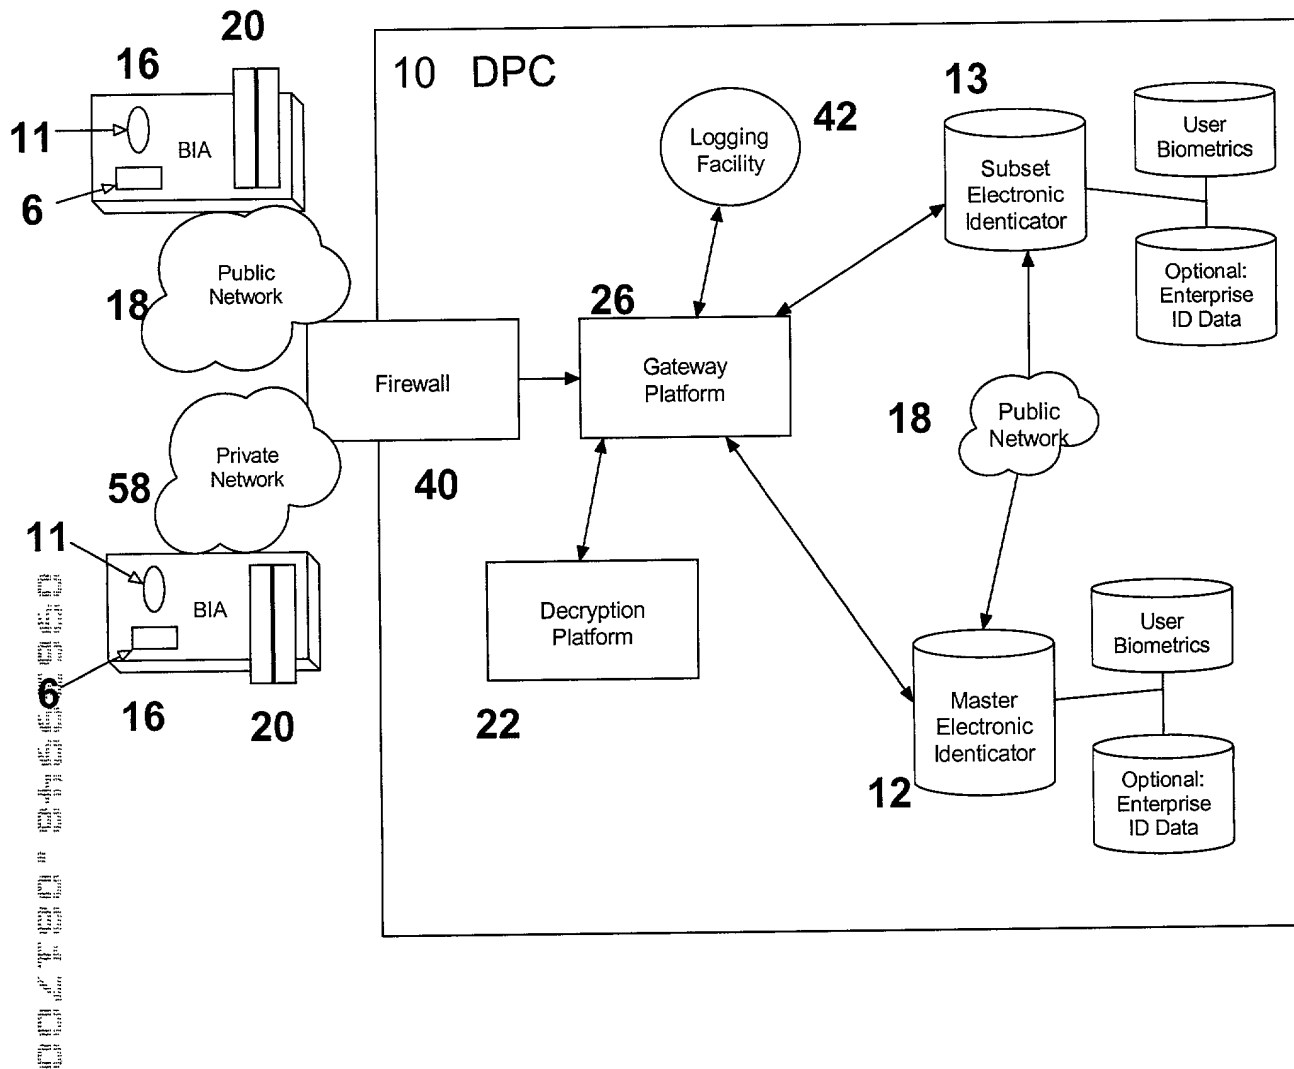

# Fig. 2



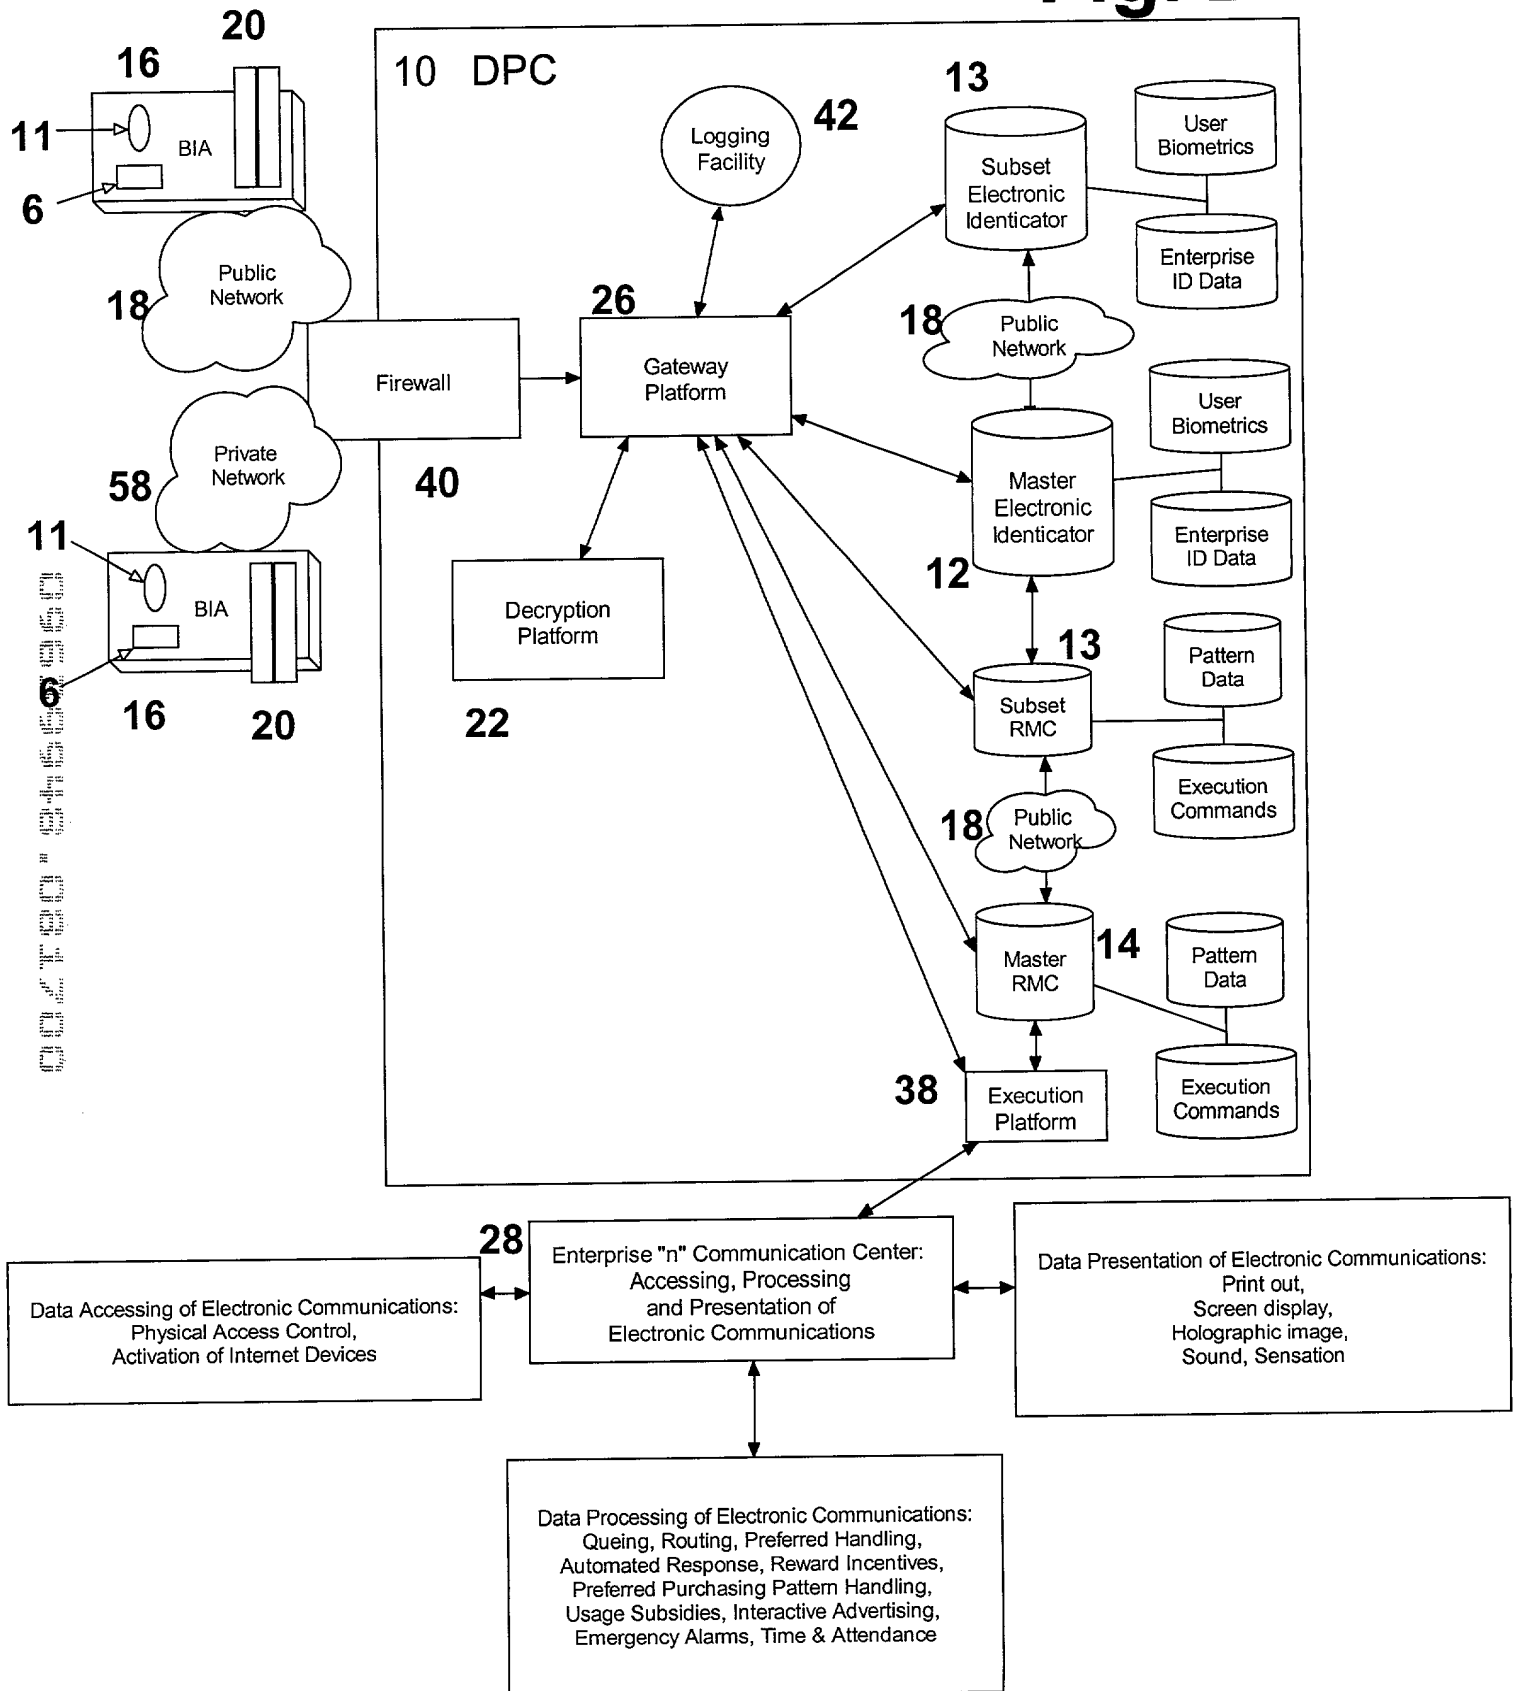



FIG. 3

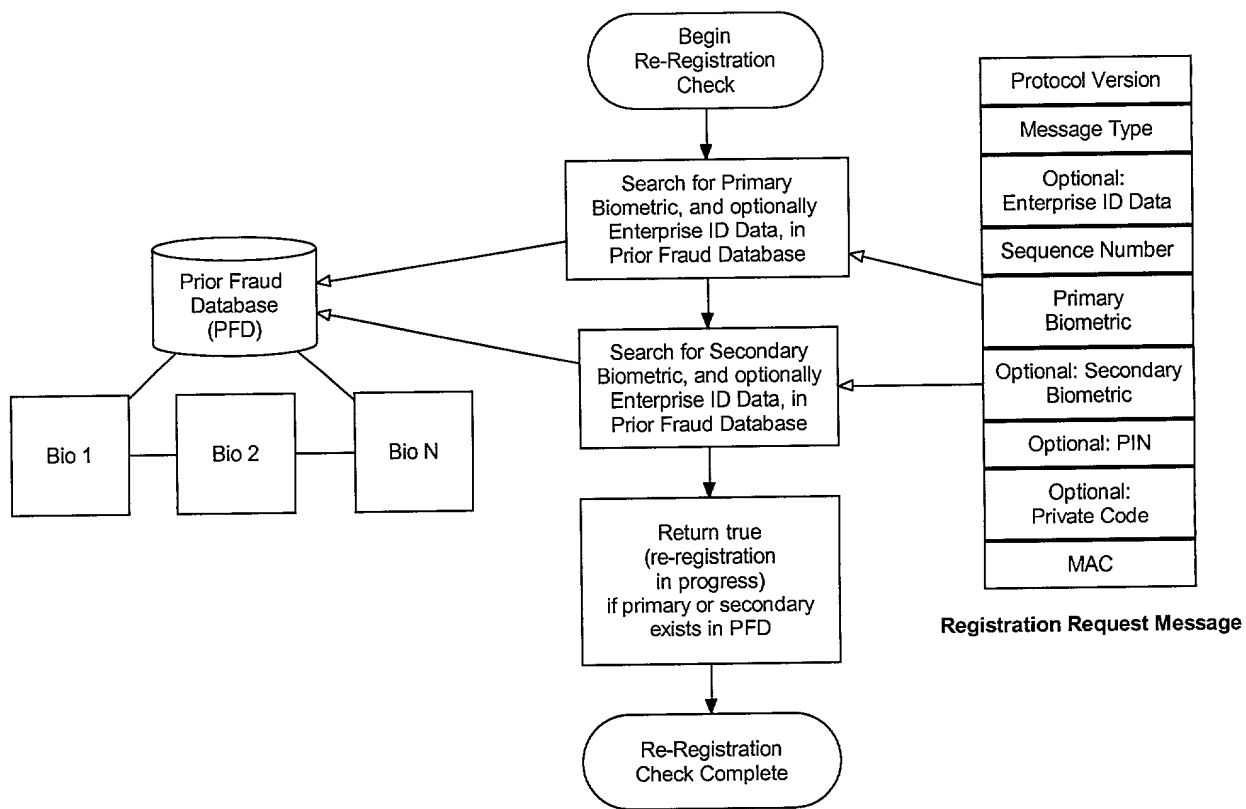

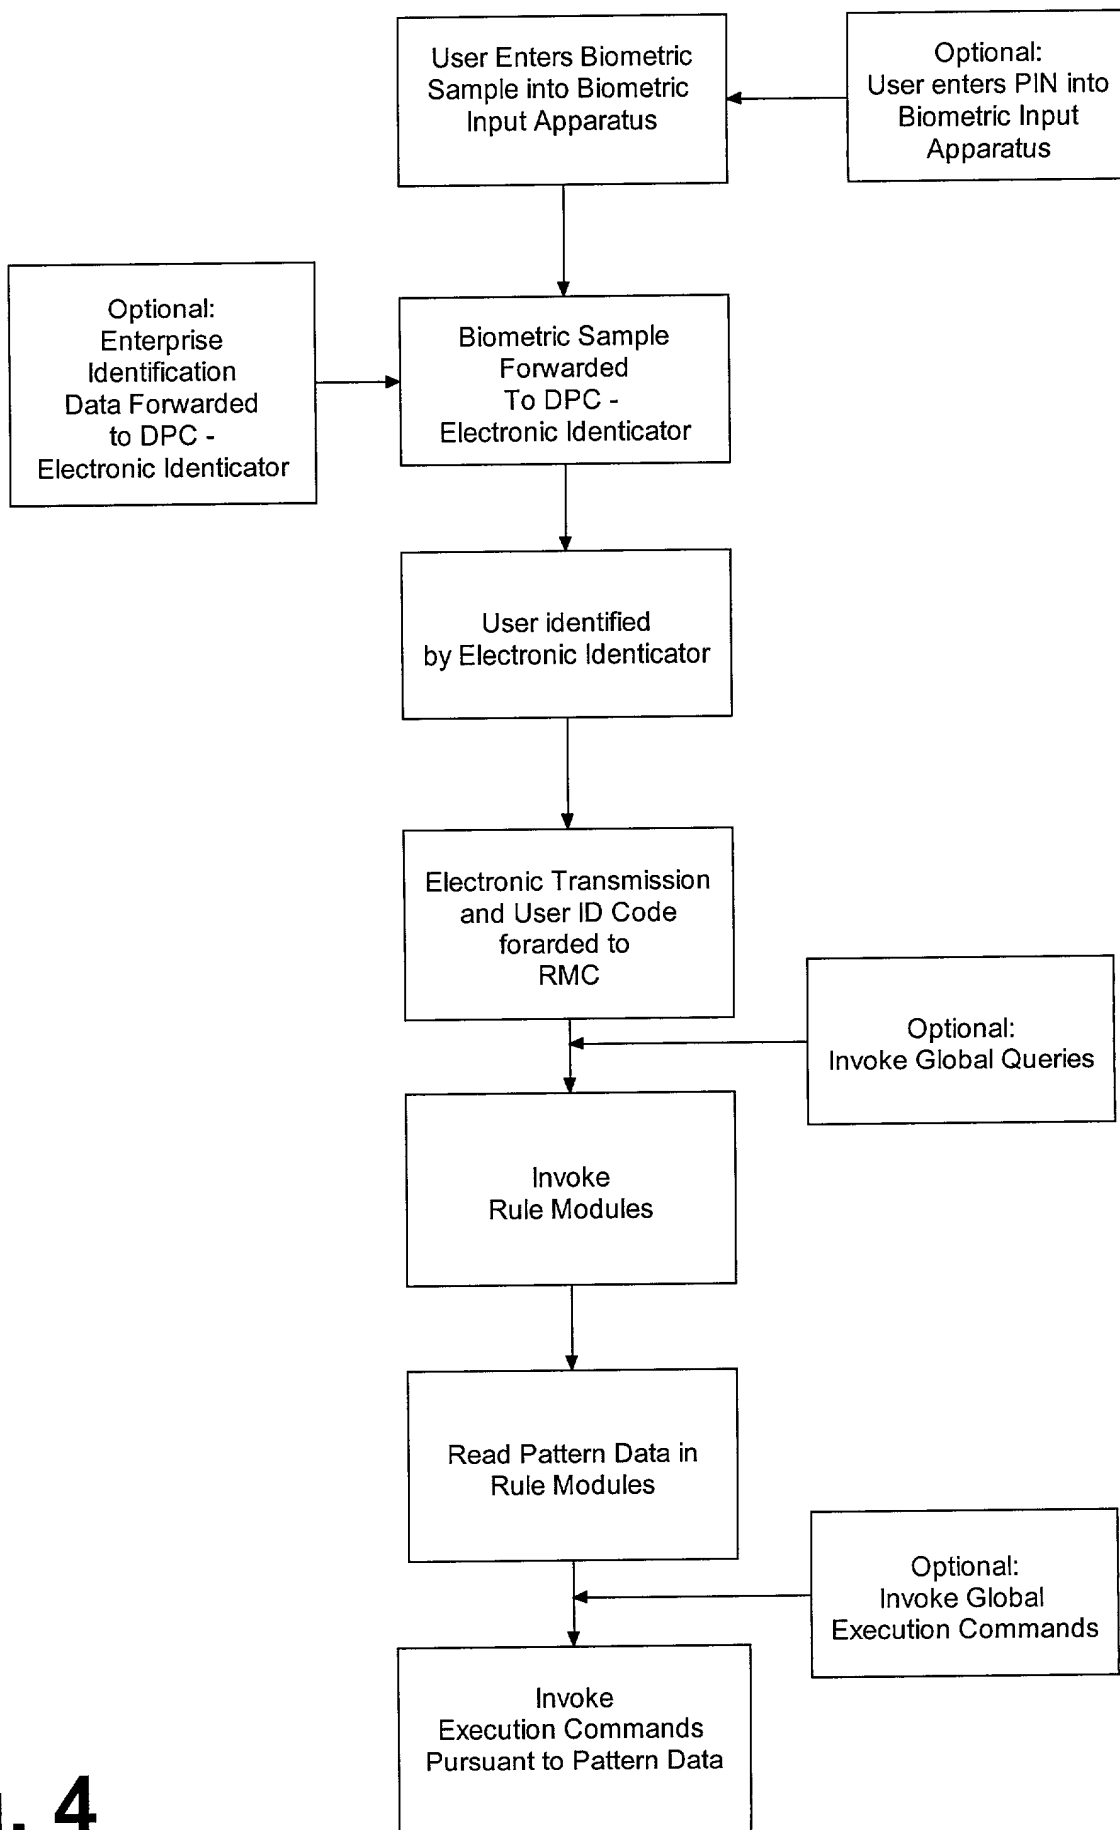


**Fig. 4**


# Fig. 5

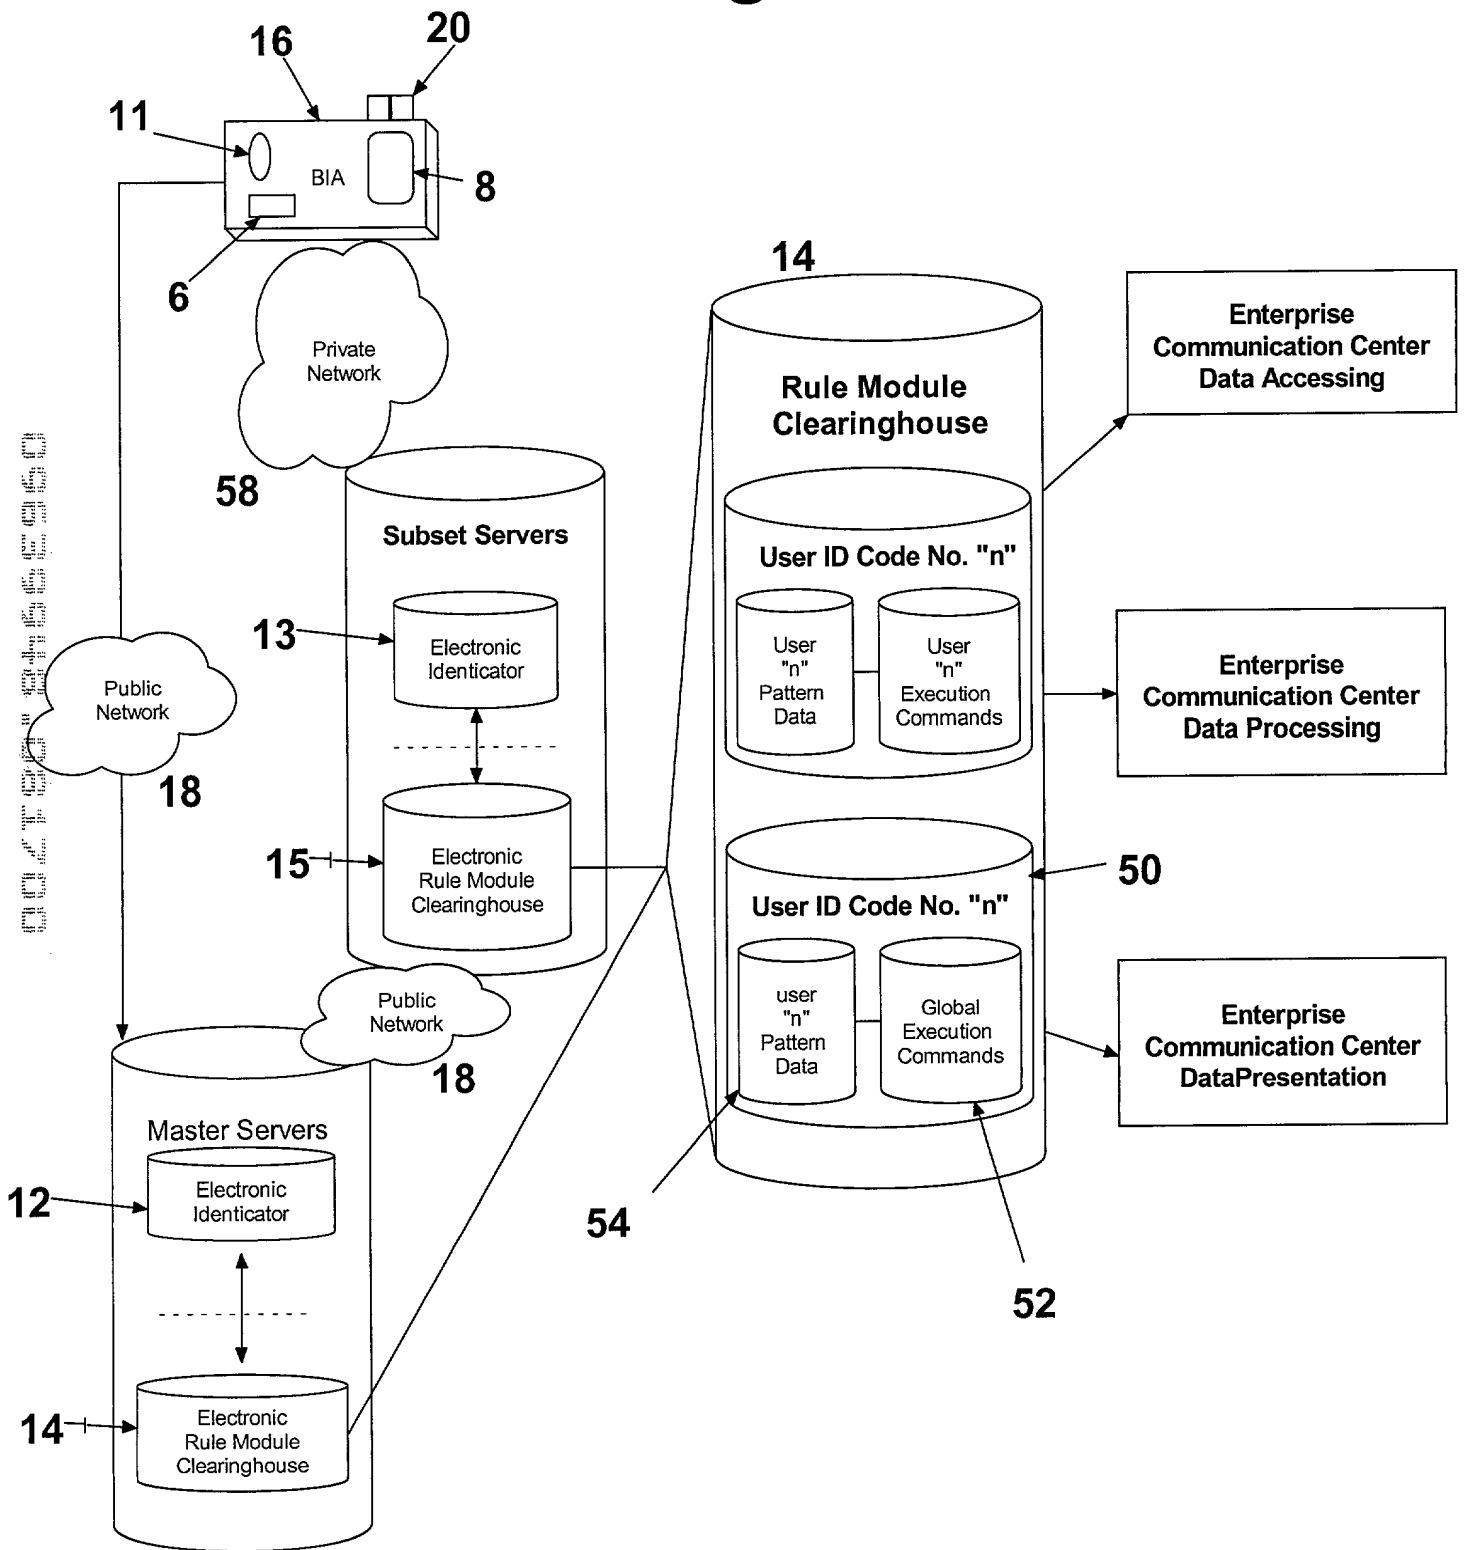


# Fig. 6

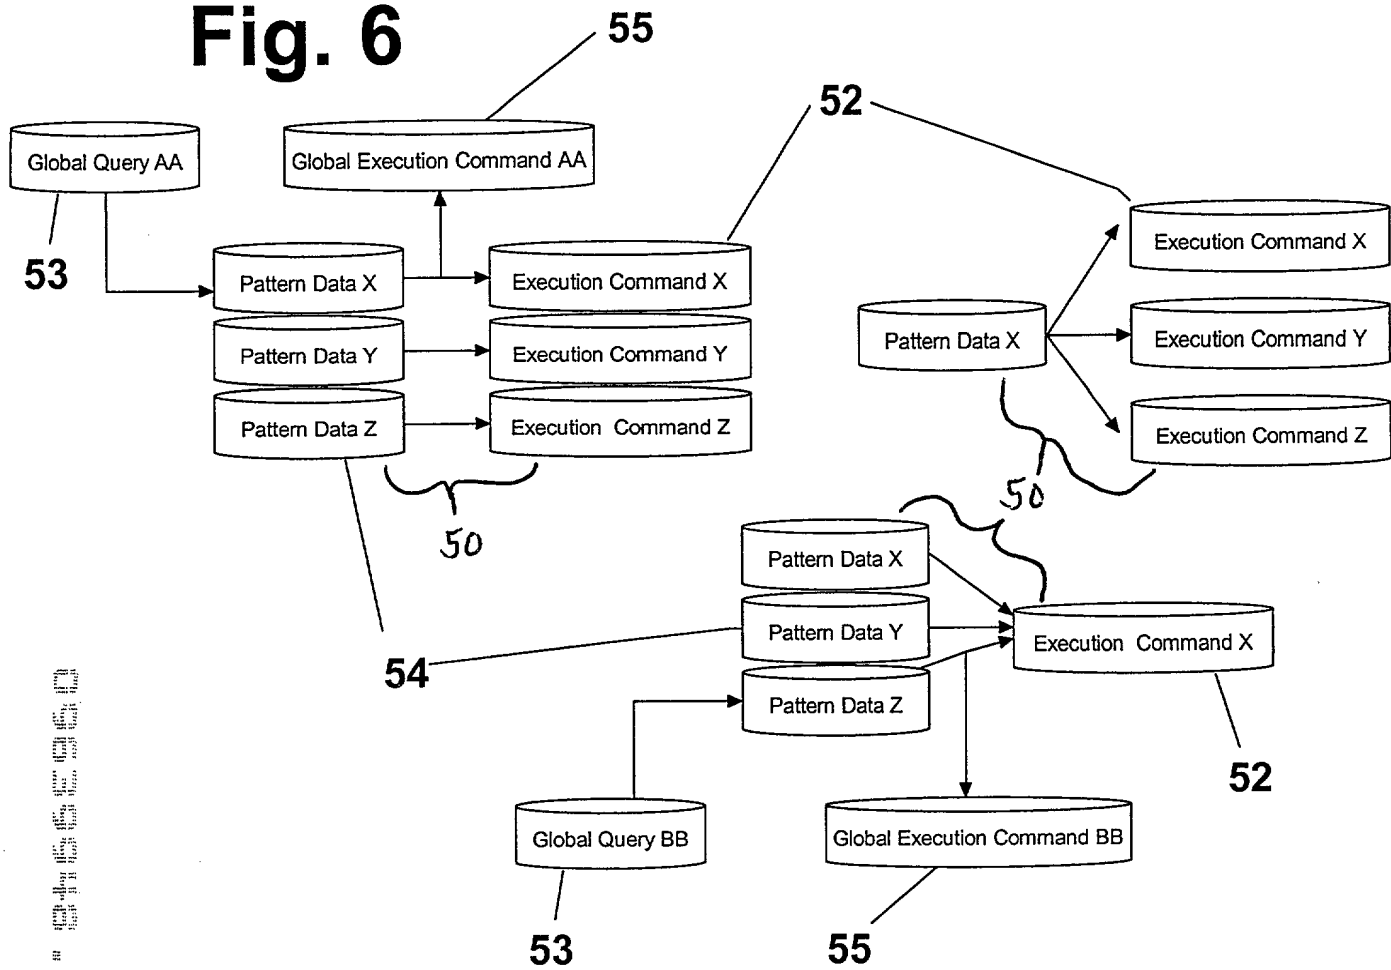

# Fig. 7

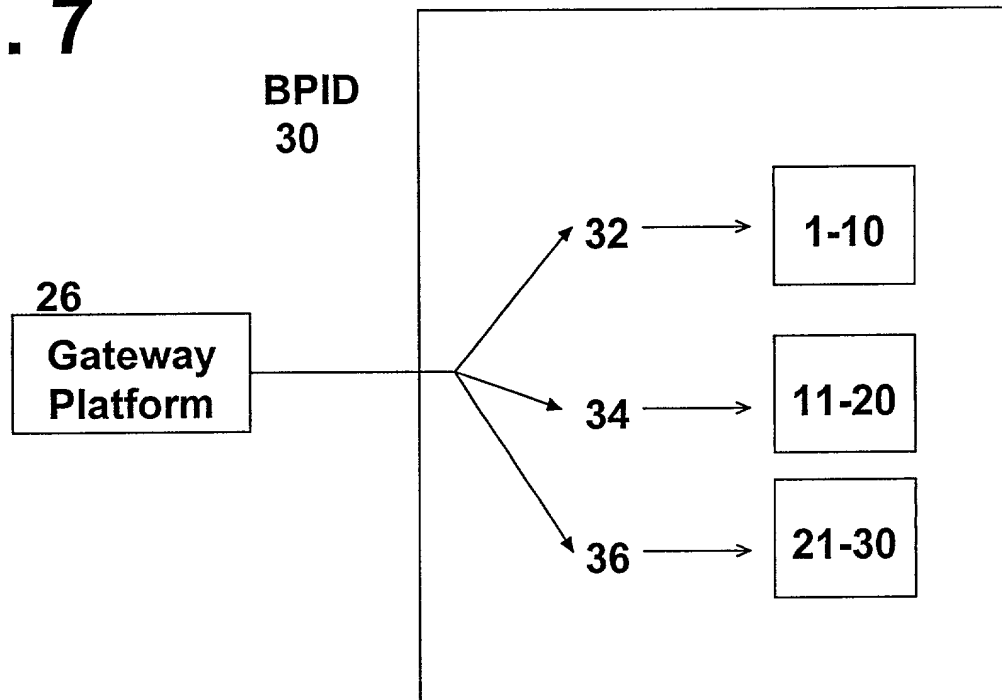

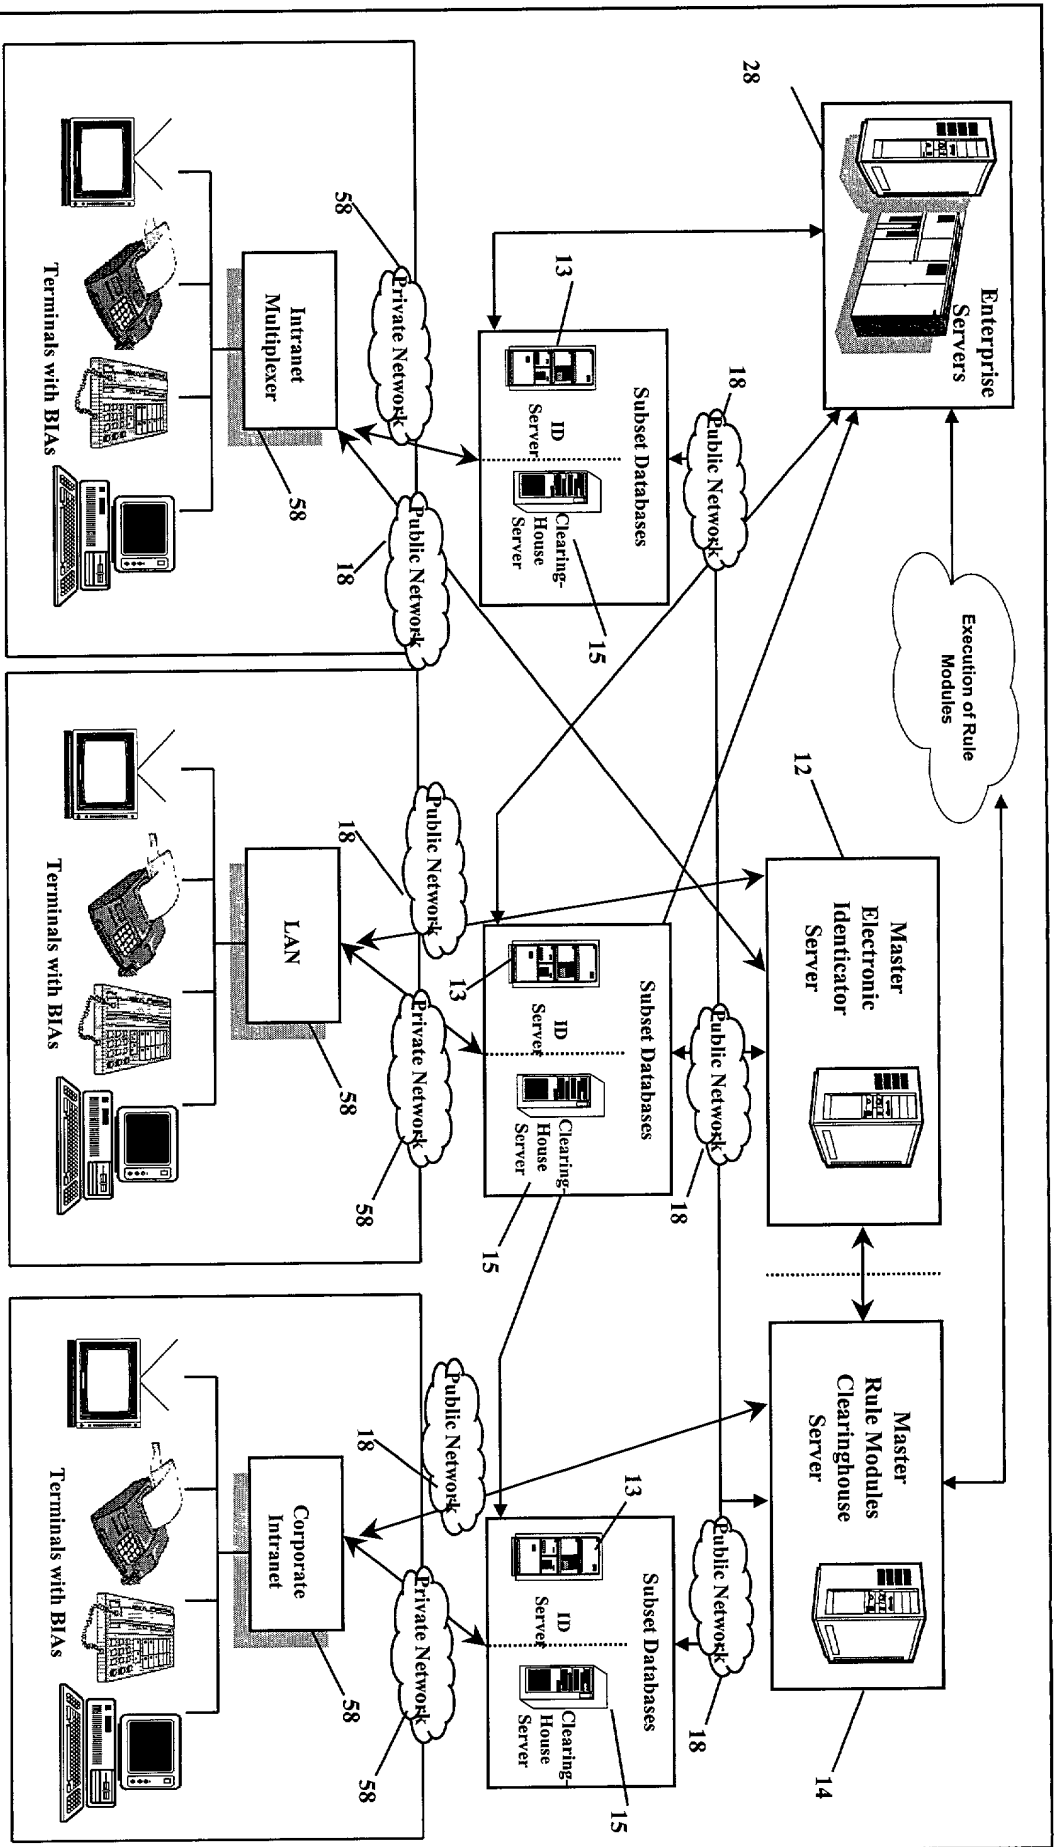

**Fig. 8**

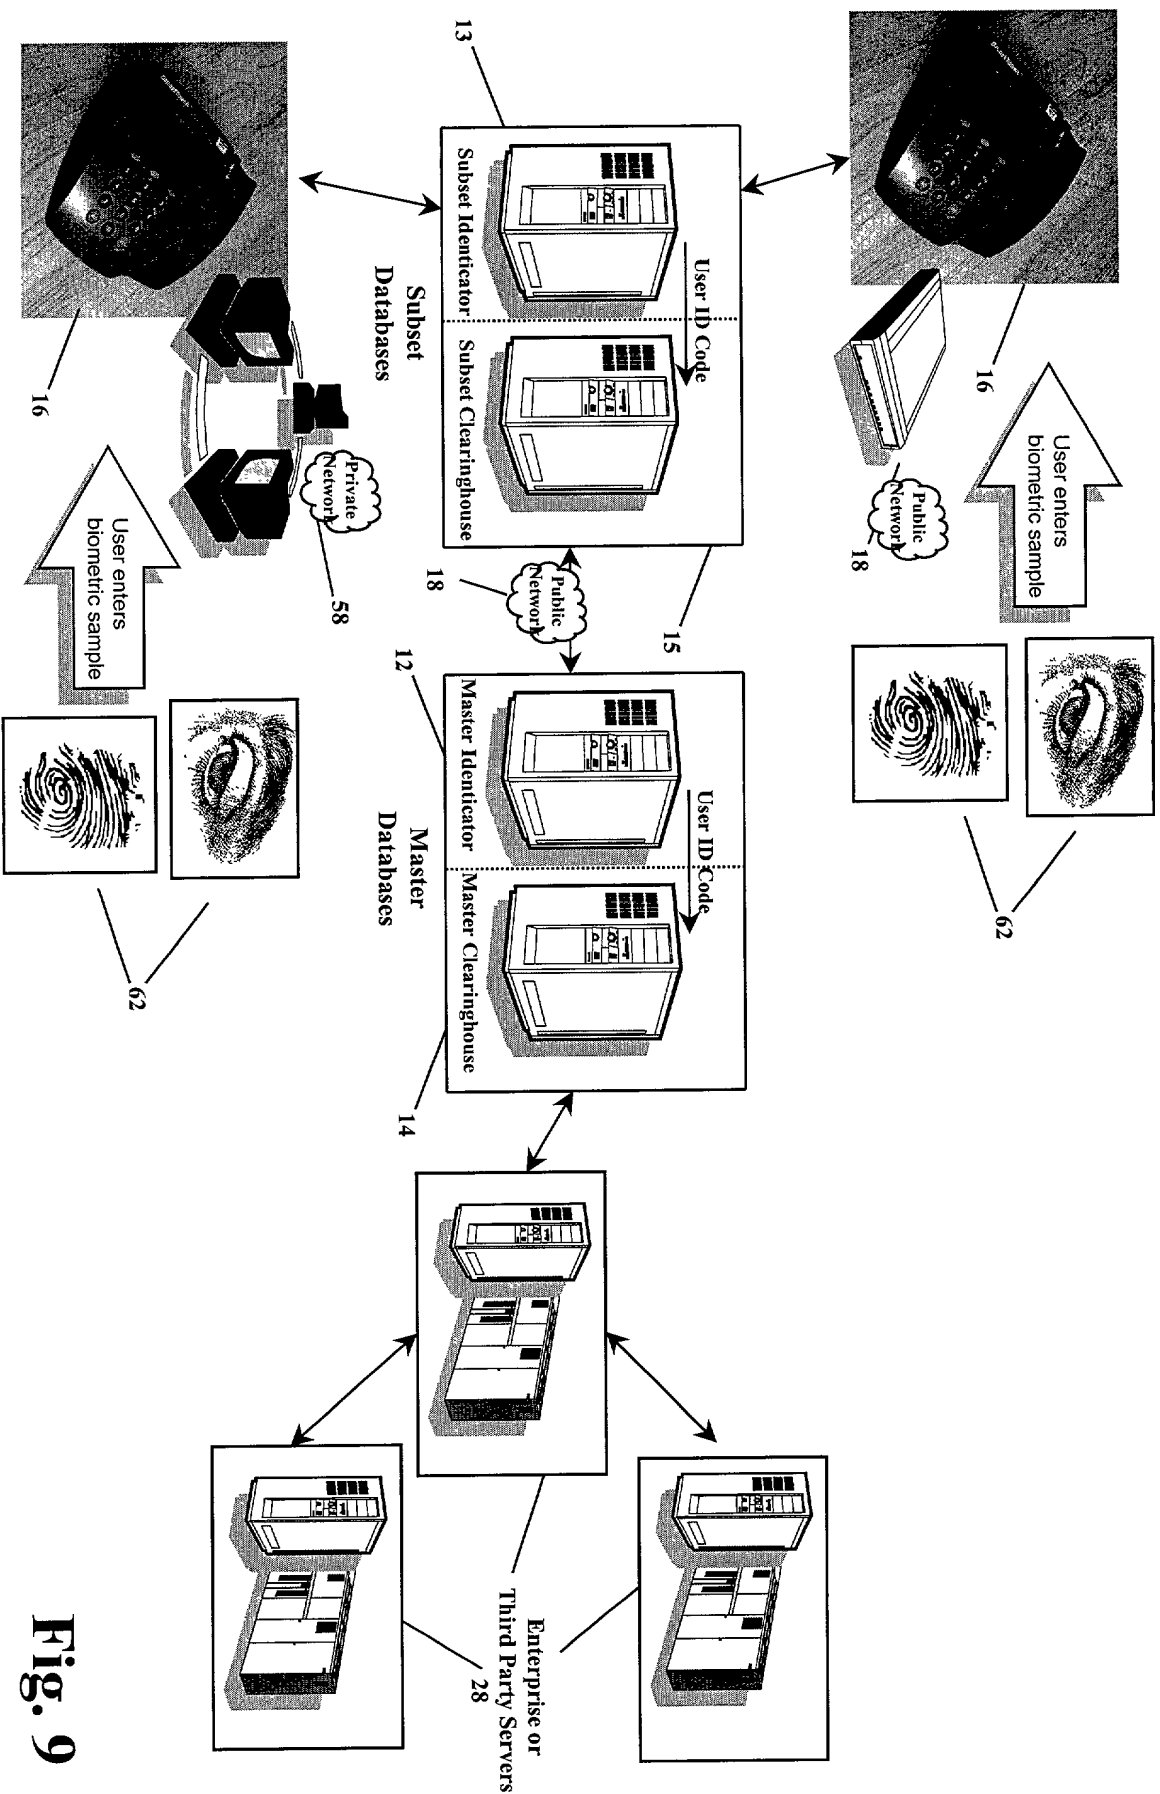


Fig. 9

FIG. 9 is a block diagram of a biometric authentication system architecture.



**DECLARATION FOR UTILITY PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if more than one name is listed below) of the subject matter that is claimed and for which a patent is sought on the invention entitled

A System and Method For Tokenless Biometric Authorization of Electronic Communications

☒ The specification of which is attached hereto.

☐ The specification of which was filed on \_\_\_\_\_ as part of application no. \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information that is material to the patentability of the invention as claimed in this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:


Application Ser. No.	Country	Day/Month/Year Filed
----------------------	---------	----------------------

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 that occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Ser. No.	Filing Date	Status:
09/398,914	September 16, 1999	Pending
09/244,784	February 5, 1999	Issued
08/705,399	August 29, 1996	Issued
08/442,895	May 17, 1995	Issued
08/345,523	November 28, 1994	Issued

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Ned Hoffman.

Inventor's signature: 

Date: 8/15/05

Residence: Sebastopol, California      Citizenship: United States

Post Office Address: 977 Daniel Street, Sebastopol, California 95472